

Merchant & Independent

DIY essentials



2025 EDITION

PHONE: 01952 238100 EMAIL: sales@bgelectrical.co.uk

Our Brands



LED Lighting

Luceco is a manufacturer and distributor of high efficiency, energy saving LED luminaires to the trade and specification markets. Established in 2013, to address the rapidly growing LED lighting market, Luceco LED lighting has rapidly established itself as one of the leading brands for professional lighting in the UK.

www.luceco.com



Portable Power

Founded in 1988 Masterplug is the UK market leader, serving retailers and trade wholesalers. We also offer a subrange under the Pro-XT trademark and supply a limited number of unbranded products to major customers.

www.masterplug.com



EV Charging

Sync Energy was established in 2009 by two British entrepreneurs focussed on improving our world through renewable energies. In 2015 we entered the exciting world of electric vehicle charging, quickly becoming pioneers in the industry with the world's smallest EV charger.



Cable Management

D-Line is renowned for its innovative cable management solutions, designed to enhance both safety and aesthetics in various environments. Established in 2006, D-Line patented its decorative cable raceway system, featuring subtle D-shaped half-round and quarter-round profiles that seamlessly blend with modern décor. These designs have gained international popularity, with D-Line products now available in over 30 countries.



Wiring Accessories

BG Electrical is a leading manufacturer and distributor of high quality and innovative wiring accessories, circuit protection and portable power. With over 80 years of experience in manufacturing and distribution of electrical accessories, BG has gained an invaluable reputation.

www.bgelectrical.uk



TV Wall Mounts/AV Accessories

Ross is a leading manufacturer of premium TV wall mounts and AV accessories. We service all product areas from entry level through to premium with a full range of products to suit every requirement and usage case scenario. All models are produced in-house at our industry leading manufacturing facility and are sold worldwide through a growing network of trade and retail partners.

www.ross.uk

Acquired by the Luceco group in 2022 and renamed Sync Energy we continue to develop innovative EV charger technology.

Our range of EV charging products for home or the workplace are smart, powerful and safe, packed full of technology, future-proofing your investment.

www.sync.energy

Our product range includes fire-rated cable supports and Cable Tidy Units, addressing safety concerns and reducing clutter in both homes and workplaces. D-Line's commitment to inventive solutions has earned them prestigious accolades, including Queen's Awards for Export and Innovation. In 2024, D-Line became part of the Luceco Group, further enhancing its market presence and product offerings.

www.d-line-it.com

Contents



Moulded
4-7



Evolve
8-12



Nexus Metal
13-17



Storm Weatherproof
Accessories
18-19



Metal Clad
20-21



Junction Boxes &
Contractor Range
22-25



Smoke, Heat
& CO Alarms
26-27



Ceiling & Lighting
Accessories
28-29



BG
Circuit Protection
30-35



Sync Energy
EV Charging
36-39




Masterplug
Portable Power
40-67



Luceco
LED Lighting
68-89



D-Line
90-95



Ross TV Mounts
& Accessories
96-99

13 Amp Double Switched Socket with Fast Charge USB A + C (22W)

- Ideal for charging smartphones, tablets, power banks and portable gaming devices
- Simultaneous charging of two devices (22W shared across two ports)
- Smart Charging with variable voltage - only delivers the power that your device needs, without overcharging.
- Supports PD & QC charging protocols for Android and iOS devices (when using a certified cable)
- Minimum mounting box depth 25mm - ideal for retro-fit
- Terminal Capacity 3 x 2.5mm², 3 x 4.0mm², 2 x 6mm²
- Twin Earth fitted as standard - Ref. BS 7671:2008
- Manufactured to BS1363-2
- 10 Year Guarantee
- Available in 900 Square Edge



822UAC22

Round Edge	Square Edge	Description	Inner Carton	Outer Carton
822UAC22	922UAC22	13A Double USB Socket A+C 22W	5	50



20 Amp 16AX Plate Switches

- 20 Amp, 16AX inductive rated
- Captive terminal screws
- Terminal capacity 4 x 1.0mm², 4 x 1.5mm², 2 x 2.5mm² & 1 x 4.0mm²
- Plate-switches manufactured to BS EN 60669-1
- Minimum mounting box depth: single & double - 16mm; 3, 4 & 6 gang - 25mm
- Available in 900 Square Edge



911

Round Edge	Square Edge	Description	Inner Carton	Outer Carton
811	911	Single, 1 way	10	100
812	912	Single, 2 way	10	100
813	913	Intermediate switch	10	100
842	942	Double, 2 way	10	100
843	943	Triple, 2 way	10	100



10 Amp 3 Pole Fan Isolator

- 10 Amp, triple pole
- Captive terminal screws
- Terminal capacity 4 x 1.0mm², 4 x 1.5mm², 2 x 2.5mm² & 1 x 4.0mm²
- Manufactured to IEC 60669-2-4
- Minimum mounting box depth - 16mm
- Available in 900 Square Edge



815

Round Edge	Square Edge	Description	Inner Carton	Outer Carton
815	915	3 pole fan isolator	10	100



13 Amp Socket Outlets

- Twin earth fitted as standard to allow a double earth facility for installations requiring high integrity protective connection Ref. BS 7671:2008
- Manufactured to BS 1363-2
- Minimum mounting box depth - 25mm
- Terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²
- Available in 900 Square Edge



822

Round Edge	Square Edge	Description	Inner Carton	Outer Carton
821	921	Single switched SP	10	100
822	922	Double switched SP	5	50




Type A RCD Protection

- Maximum load 3120 watts 240V A
- 30 mA trip speed 40 ms
- Latching type
- Terminal capacity 3 x 2.5mm², 2 x 4.0mm² & 1 x 6.0mm²
- Manufactured to BS 7288:2016
- Minimum mounting box depth - 35mm
- 855ARCD - Removable flex outlet
- 10mm spacer provided for shallow boxes



855ARCD

Round Edge	Description	Inner Carton	Outer Carton
855ARCD	13 Amp fused connection unit	10	100



13 Amp Fused Connection Units

- Manufactured to BS 1363-4
- Angled colour coded terminals with captive screws
- Terminal capacity 3 x 2.5mm², 2 x 4.0mm² & 1 x 6.0mm²
- Minimum mounting box depth - 25mm
- Square edge products have an integrated flex outlet and reversible cord-grip. Flex out knockout on bottom edge of the plate
- Available in 900 Square Edge



852

Round Edge	Square Edge	Description	Inner Carton	Outer Carton
852	952	Switched and fused with indicator	10	100
854	954	Unswitched and fused	10	100

13 Amp Fused Connection Units - with Flex Outlet

- Manufactured to BS 1363 Part 4
- Angled colour coded terminals with captive screws
- Terminal capacity 3 x 2.5mm², 2 x 4.0mm² & 1 x 6.0mm²
- Cable entry at lower edge, with removable blanking piece, and reversible cord-grip
- Minimum mounting box depth 25mm



851

Round Edge	Description	Inner Carton	Outer Carton
851	Switched and fused	10	100



45 Amp Double Pole Switches

- Cooker control units manufactured to BS4177
- Double pole switches to BS EN 60669-1
- Minimum mounting box depth - 47mm
- L & N terminal capacity 4 x 4.0mm², 3 x 6.0mm² & 1 x 16.0mm²
- E terminal capacity 3 x 4.0mm², 3 x 6.0mm² & 1 x 6.0mm²
- 10mm spacer available to provide additional wiring space (817 - Sq, 818 - Rect)
- Available in 900 Square Edge

Round Edge	Square Edge	Description	Inner Carton	Outer Carton
872	972	Large plate with indicator	5	50
874	974	Single plate with indicator	10	100



45 Amp Cooker Control Unit

- Cooker control units manufactured to BS4177
- Double pole switches to BS EN 60669-1
- Minimum mounting box depth - 47mm
- L & N terminal capacity 4 x 4.0mm², 3 x 6.0mm² & 1 x 16.0mm²
- E terminal capacity 3 x 4.0mm², 3 x 6.0mm² & 1 x 6.0mm²
- 10mm spacer available to provide additional wiring space (817 - Sq, 818 - Rect)
- Available in 900 Square Edge

Round Edge	Square Edge	Description	Inner Carton	Outer Carton
870	970	Cooker control unit with 13 Amp socket and indicators	5	50



20 Amp Double Pole Switches

- 20 Amp terminal capacity 3x 2.5mm², 2x 4.0mm² & 1 x 6.0mm²
- 32 Amp terminal capacity 2x 10mm² & 1 x 10mm² earth
- Colour coded terminals with captive backed out screws
- Manufactured to BS EN 60669-1
- Minimum mounting box depth - 25mm
- Square edge has flex outlet with knock-out and reversible cord grip in bottom edge. Rounded edge cable entry at lower edge, with removable blanking piece, and reversible cord-grip
- Available in 900 Square Edge

Round Edge	Square Edge	Description	Inner Carton	Outer Carton
831	931	20 Amp with indicator	10	100



Shaver Socket

- Terminal capacity 3 x 2.5mm² & 2 x 4.0mm²
- Minimum mounting box depth 47mm
- Manufactured to BS EN 61558-1 and BS EN 61558-2-5
- Available in 900 Square Edge

Round Edge	Square Edge	Description	Inner Carton	Outer Carton
820	940	115/240V dual voltage shaver socket	5	30



Intelligent Dimmer Switch - Push Type

- Intelligent dimmer suitable for LED, halogen and incandescent lamps
- Soft start, smooth dimming control and silent operation
- 2 Way push on/off with rotary control
- Overload protection
- Clearly marked terminals with backed out captive screws for easy installation
- Terminal capacity 3 x 1mm², 2 x 1.5mm² & 1 x 2.5mm²
- Manufactured to BS EN 60669-2-1
- Minimum mounting box depth 25mm
- 220-240V AC
- Available in 900 Square Edge

Round Edge	Square Edge	Description	Inner Carton	Outer Carton
881	981	Single, 2 way push on/off	10	100
882	982	Double, 2 way push on/off	10	100



Co-Axial Socket Outlet

- EM = Euro Module configuration
- Manufactured to BS 5733 where applicable
- Co-axial minimum mounting box depth - 25mm
- Available in 900 Square Edge

Round Edge	Square Edge	Description	Inner Carton	Outer Carton
860	960	Single co-axial socket	10	100



Blank Plates

- Blank plates are ideal for safely covering unused electrical connections
- Manufactured to BS 5733
- Available in 900 Square Edge

Round Edge	Round Edge	Description	Inner Carton	Outer Carton
894	904	Single blank plate	20	200
895	905	Double blank plate	10	100



Surface Boxes and Spacers

- Surface boxes have multiple knock-outs and earth terminal fitted as standard
- Manufactured to BS 5733
- Spacers provide greater clearance for installation wiring where shallow mounting boxes are used, an alternative to fitting a deeper box
- Available in 900 Square Edge

Round Edge	Round Edge	Description	Inner Carton	Outer Carton
891	901	Single surface pattress for socket outlet 32mm	10	100
892	902	Double surface pattress 32mm	5	50
893	903	Single pattress with earth terminal for plate switches 19mm	10	100
877	977	Single surface box, 50mm (877), 45mm (977)	10	100
878	978	Double surface box, 50mm (878), 45mm (978)	5	50




20 Amp 16AX Light Switches

- Manufactured to BS EN 60669-1
- Captive terminal screws
- Terminal capacity 4x1.0mm², 4x1.5mm², 2x2.5mm² & 1x4.0mm²
- Minimum mounting box depth – 25mm



Single 2 Way	Single Intermediate	Double 2 Way	Triple 2 Way	Finish	Frame & Switch Colour	Inner Carton	Outer Carton
PCDCL12W	PCDCL13W	PCDCL42W	PCDCL43W	Pearlescent White	White	5	50
PCDBS12W	PCDBS13W	PCDBS42W	PCDBS43W	Brushed Steel	White	5	50
PCDMG12B	PCDMG13B	PCDMG42B	PCDMG43B	Matt Grey	Black	5	50
PCDMB12B	PCDMB13B	PCDMB42B	PCDMB43B	Matt Black	Black	5	50
PCDBB12B	PCDBB13B	PCDBB42B	PCDBB43B	Matt Blue	Black	5	50
PCDCP12B	PCDCP13B	PCDCP42B	PCDCP43B	Polished Copper	Black	5	50
PCDSB12B	PCDSB13B	PCDSB42B	PCDSB43B	Satin Brass	Black	5	50
PCDBC12B	PCDBC13B	PCDBC42B	PCDBC43B	Black Chrome	Black	5	50



PCDBS42W

20 Amp 16AX Light Switches - Edge Rocker

- Full face 'edge to edge' rocker switch provides an attractive large touch point for ease of operation
- Clip on rockers with no visible fixing screws
- Manufactured to BS EN 60669-1
- Terminal capacity 4x1.0mm², 4x1.5mm², 2x2.5mm² & 1x4.0mm²
- Minimum mounting box depth 1-2G 25mm, 3G 35mm



Single 2 Way	Single Intermediate	Double 2 Way	Triple 2 Way	Finish	Frame Colour
PCDCL12EW	PCDCL13EW	PCDCL42EW	PCDCL43EW	Pearlescent White	White
PCDBS12EW	PCDBS13EW	PCDBS42EW	PCDBS43EW	Brushed Steel	White
PCDMG12B	PCDMG13B	PCDMG42B	PCDMG43B	Matt Grey	Black
PCDMB12B	PCDMB13B	PCDMB42B	PCDMB43B	Matt Black	Black
PCDBB12B	PCDBB13B	PCDBB42B	PCDBB43B	Matt Blue	Black
PCDCP12B	PCDCP13B	PCDCP42B	PCDCP43B	Polished Copper	Black
PCDSB12B	PCDSB13B	PCDSB42B	PCDSB43B	Satin Brass	Black
PCDBC12B	PCDBC13B	PCDBC42B	PCDBC43B	Black Chrome	Black



PCDMB13B


PCDSB42B
PCDBB43B

20 Amp 16AX Light Switches – Wide Rocker

- Large touch point for ease of operation
- Manufactured to BS EN 60669-1
- Captive terminal screws
- Terminal capacity 4x1.0mm², 4x1.5mm², 2x2.5mm² & 1x4.0mm²
- Minimum mounting box depth – 25mm



Single 2 Way	Double 2 Way	Finish	Frame & Switch Colour	Inner Carton	Outer Carton
PCDCL12WW	PCDCL42WW	Pearlescent White	White	5	50
PCDBS12WW	PCDBS42WW	Brushed Steel	White	5	50
PCDMG12WB	PCDMG42WB	Matt Grey	Black	5	50
PCDMB12WB	PCDMB42WB	Matt Black	Black	5	50
PCDBB12WB	PCDBB42WB	Matt Blue	Black	5	50
PCDCP12WB	PCDCP42WB	Polished Copper	Black	5	50
PCDSB12WB	PCDSB42WB	Satin Brass	Black	5	50
PCDBC12WB	PCDBC42WB	Black Chrome	Black	5	50




PCDBS12WW



APPROVED

13 Amp Double Switched Socket with Fast Charge USB A + C (22W)

- Ideal for charging smartphones, tablets, power banks and portable gaming devices
- Simultaneous charging of two devices (22W shared across two ports)
- Smart Charging with variable voltage - only delivers the power that your device needs, without overcharging
- Supports PD & QC charging protocols for Android and iOS devices (when using a certified cable)
- Minimum mounting box depth 25mm - ideal for retro-fit
- Terminal Capacity 3 x 2.5mm², 3 x 4.0mm², 2 x 6mm²
- Twin Earth fitted as standard - Ref. BS 7671:2008
- Manufactured to BS1363-2
- 10 Year Guarantee



PCDSB22UAC22B

Double 22W USB	Finish	Frame & Insert Colour	Inner Carton	Outer Carton
PCDCL22UAC22W	Pearlescent White	White	5	50
PCDBS22UAC22W	Brushed Steel	White	5	50
PCDMG22UAC22B	Matt Grey	Black	5	50
PCDMB22UAC22B	Matt Black	Black	5	50
PCDBB22UAC22B	Matt Blue	Black	5	50
PCDCP22UAC22B	Polished Copper	Black	5	50
PCDSB22UAC22B	Satin Brass	Black	5	50
PCDBC22UAC22B	Black Chrome	Black	5	50

Switched Socket Outlets

- Twin earth fitted as standard to allow a double earth facility for installations requiring high integrity protective connection Ref. BS 7671:2008
- Angled in-line colour coded terminals
- 13A sockets manufactured to BS 1363-2
- Captive terminal screws
- Terminal capacity 3x2.5mm², 3x4.0mm² & 2x6.0mm²
- Minimum mounting box depth – 35mm



Single	Double	Finish	Frame & Insert Colour	Inner Carton	Outer Carton
PCDCL21W	PCDCL22W	Pearlescent White	White	5	50
PCDBS21W	PCDBS22W	Brushed Steel	White	5	50
PCDMG21B	PCDMG22B	Matt Grey	Black	5	50
PCDMB21B	PCDMB22B	Matt Black	Black	5	50
PCDBB21B	PCDBB22B	Matt Blue	Black	5	50
PCDCP21B	PCDCP22B	Polished Copper	Black	5	50
PCDSB21B	PCDSB22B	Satin Brass	Black	5	50
PCDBC21B	PCDBC22B	Black Chrome	Black	5	50



PCDDB21B



PCDCB21B



APPROVED

20 Amp Double Pole Switches

- Flush LED indicator
- Colour coded terminals
- Manufactured to BS EN 60669-1
- Terminal capacity 3x2.5mm², 2x4.0mm² & 1x6.0mm²
- Minimum mounting box depth – 25mm



20A DP Switch with LED	Finish	Frame & Switch Colour	Inner Carton	Outer Carton
PCDCL31W	Pearlescent White	White	5	50
PCDBS31W	Brushed Steel	White	5	50
PCDMG31B	Matt Grey	Black	5	50
PCDMB31B	Matt Black	Black	5	50
PCDBB31B	Matt Blue	Black	5	50
PCDCP31B	Polished Copper	Black	5	50
PCDSB31B	Satin Brass	Black	5	50
PCDBC31B	Black Chrome	Black	5	50



PCDCL31W



PCDMG31B



APPROVED

Fused Connection Units

- Optional cable outlet
- Colour coded terminals with backed out captive screws for easy installation
- Flush LED power indicator
- Manufactured to BS 1363-4
- Terminal capacity 3x2.5mm², 2x4.0mm² & 1x6.0mm²
- Minimum mounting box depth – 35mm

Switched	Unswitched	Finish	Frame & Insert Colour	Inner Carton	Outer Carton
PCDCL52W	PCDCL54W	Pearlescent White	White	5	50
PCDBS52W	PCDBS54W	Brushed Steel	White	5	50
PCDMG52B	PCDMG54B	Matt Grey	Black	5	50
PCDMB52B	PCDMB54B	Matt Black	Black	5	50
PCDBB52B	PCDBB54B	Matt Blue	Black	5	50
PCDCP52B	PCDCP54B	Polished Copper	Black	5	50
PCDSB52B	PCDSB54B	Satin Brass	Black	5	50
PCDBC52B	PCDBC54B	Black Chrome	Black	5	50



Cooker Control Unit

- Cooker control units manufactured to BS4177
- Double pole switches to BS EN 60669-1
- Flush LED indicators
- Colour coded terminals with captive backed out screws
- Twin earth for high integrity circuits
- Terminal capacity 4 x 4.0mm², 3 x 6.0mm² & 1 x 16.0mm²
- Minimum mounting box depth – 47mm

Cooker Control Unit	Finish	Frame & Insert Colour	Inner Carton	Outer Carton
PCDCL70W	Pearlescent White	White	5	50
PCDBS70W	Brushed Steel	White	5	50
PCDMG70B	Matt Grey	Black	5	50
PCDMB70B	Matt Black	Black	5	50
PCDBB70B	Matt Blue	Black	5	50
PCDCP70B	Polished Copper	Black	5	50
PCDSB70B	Satin Brass	Black	5	50
PCDBC70B	Black Chrome	Black	5	50



45 Amp Double Pole Switches

- Manufactured to BS EN 60669-1
- Flush LED indicator
- Colour coded terminals with captive backed out screws
- Twin earth for high integrity circuits
- Terminal capacity 4x4.0mm², 3x6.0mm² & 1x16.0mm²
- Minimum mounting box depth – 47mm

Rectangular Plate	Square Plate	Finish	Frame Colour	Inner Carton	Outer Carton
PCDCL72W	PCDCL74W	Pearlescent White	White	5	50
PCDBS72W	PCDBS74W	Brushed Steel	White	5	50
PCDMG72B	PCDMG74B	Matt Grey	Black	5	50
PCDMB72B	PCDMB74B	Matt Black	Black	5	50
PCDBB72B	PCDBB74B	Matt Blue	Black	5	50
PCDCP72B	PCDCP74B	Polished Copper	Black	5	50
PCDSB72B	PCDSB74B	Satin Brass	Black	5	50
PCDBC72B	PCDBC74B	Black Chrome	Black	5	50



Shaver Socket

- Captive terminal screws
- Dual voltage 115/240V
- Manufactured to BS EN 61558 & BS4573
- Terminal capacity 3x2.5mm² & 2x4.0mm²
- Minimum mounting box depth – 47mm




Shaver Socket	Finish	Frame & Insert Colour	Inner Carton	Outer Carton
PCDCL20W	Pearlescent White	White	5	50
PCDBS20W	Brushed Steel	White	5	50
PCDMG20B	Matt Grey	Black	5	50
PCDMB20B	Matt Black	Black	5	50
PCDBB20B	Matt Blue	Black	5	50
PCDCP20B	Polished Copper	Black	5	50
PCDSB20B	Satin Brass	Black	5	50
PCDBC20B	Black Chrome	Black	5	50



Intelligent Dimmer Switch

- Intelligent dimmer suitable for LED, halogen and incandescent lamps
- Soft start, smooth dimming control and silent operation
- 2 Way push on/off with rotary control
- Overload protection will turn the lights down or off until the load is corrected
- Clearly marked terminals with backed out captive screws for easy installation
- Terminal capacity 3 x 1mm², 2 x 1.5mm² & 1 x 2.5mm²
- Manufactured to BS EN 60669-2-1
- Minimum mounting box depth – 25mm
- Triple and quadruple dimmers can be configured using the Evolve Grid range
- Load rating (max/min per module) 5-150W

Single	Double	Triple	Quadruple	Finish	Frame & Dimmer Colour	Inner Carton	Outer Carton
PCDCL81W	PCDCL82W	PCDCL83W	PCDCL84W	Pearlescent White	White	5	50
PCDBS81W	PCDBS82W	PCDBS83W	PCDBS84W	Brushed Steel	Brushed Steel	5	50
PCDMG81B	PCDMG82B	PCDMG83B	PCDMG84B	Matt Grey	Black	5	50
PCDMB81B	PCDMB82B	PCDMB83B	PCDMB84B	Matt Black	Black	5	50
PCDBB81B	PCDBB82B	PCDBB83B	PCDBB84B	Matt Blue	Black	5	50
PCDCP81B	PCDCP82B	PCDCP83B	PCDCP84B	Polished Copper	Black	5	50
PCDSB81B	PCDSB82B	PCDSB83B	PCDSB84B	Satin Brass	Black	5	50
PCDBC81B	PCDBC82B	PCDBC83B	PCDBC84B	Black Chrome	Black	5	50

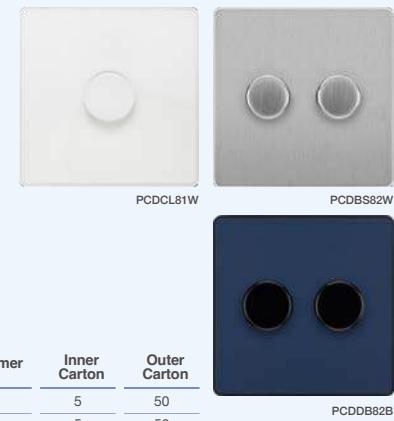

Blank Plates

- Ideal for covering unused electrical points
- Internal frame - screw fit to a standard box
- Screwless front plate clips on and off easily

Single Plate	Double Plate	Finish	Frame Colour	Inner Carton	Outer Carton
PCDCL94W	PCDCL95W	Pearlescent White	White	5	50
PCDBS94W	PCDBS95W	Brushed Steel	White	5	50
PCDMG94B	PCDMG95B	Matt Grey	Black	5	50
PCDMB94B	PCDMB95B	Matt Black	Black	5	50
PCDBB94B	PCDBB95B	Matt Blue	Black	5	50
PCDCP94B	PCDCP95B	Polished Copper	Black	5	50
PCDSB94B	PCDSB95B	Satin Brass	Black	5	50
PCDBC94B	PCDBC95B	Black Chrome	Black	5	50



Co-Axial Socket Outlets

- Screw terminal
- Manufactured to BS3041 and BS5733
- Minimum mounting box depth - 25mm
- A wider range of TV, FM and Satellite modules can be configured using Euro Modules and Evolve Euro Module front plates



Single	Finish	Frame & Module Colour	Inner Carton	Outer Carton
PCDCL60W	Pearlescent White	White	5	50
PCDBS60W	Brushed Steel	White	5	50
PCDMG60B	Matt Grey	Black	5	50
PCDMB60B	Matt Black	Black	5	50
PCDD60B	Matt Blue	Black	5	50
PCDCP60B	Polished Copper	Black	5	50
PCDSB60B	Satin Brass	Black	5	50
PCDBC60B	Black Chrome	Black	5	50



10 Amp 3 Pole Fan Isolator

- Triple pole switching design, however can be used for double pole applications if required
- Captive terminal screws
- Terminal capacity 4 x 1.0mm², 4 x 1.5mm², 2 x 2.5mm² & 1 x 4.0mm²
- Minimum mounting box depth - 25mm

Fan Isolator 10A 3 Pole	Finish	Frame & Switch Colour	Inner Carton	Outer Carton
PCDCL15W	Pearlescent White	White	5	50
PCDBS15W	Brushed Steel	White	5	50
PCDMG15B	Matt Grey	Black	5	50
PCDMB15B	Matt Black	Black	5	50
PCDDB15B	Matt Blue	Black	5	50
PCDCP15B	Polished Copper	Black	5	50
PCDSB15B	Satin Brass	Black	5	50
PCDBC15B	Black Chrome	Black	5	50



Evolve is available in the below colours:



13 Amp Double Switched Socket with Fast Charge USB A + C (22W)

- Ideal for charging smartphones, tablets, power banks and portable gaming devices
- Simultaneous charging of two devices (22W shared across two ports)
- Smart Charging with variable voltage - only delivers the power that your device needs, without overcharging.
- Supports PD & QC charging protocols for Android and iOS devices (when using a certified cable)
- Minimum mounting box depth 25mm - ideal for retro-fit
- Terminal Capacity 3 x 2.5mm², 3 x 4.0mm², 2 x 6.0mm²
- Twin Earth fitted as standard - Ref. BS 7671:2008
- Manufactured to BS1363-2
- 10 Year Guarantee



NBS22UAC22G

Brushed Steel	Description	Insert Colour	Inner Carton	Outer Carton
NBS22UAC22G	13A Double USB Socket A+C 22W	Grey	5	50



13 Amp Switched Socket Outlets

- Manufactured to BS 1363 part 2
- Terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²
- Minimum mounting box depth 25mm
- Twin earth fitted as standard to allow a double earth facility for installations requiring high integrity protective connection Ref. BS 7671:2008

*Brushed Steel insert colours = white (W), grey (G) and black (B) at the end of the product code



NBS22G

Brushed Steel	Description	Inner Carton	Outer Carton
NBS21G	Single, 13 Amp switched socket	5	50
NBS22G	Double, 13 Amp switched socket	5	50



APPROVED

20 Amp 16AX Plate Switches

- Plate switches manufactured to BS EN 60669-1
- Terminal capacity 4 x 1.0mm², 4 x 1.5mm², 2 x 2.5mm² & 1 x 4.0mm²
- Captive terminal screws
- Minimum mounting box depth:

Single and Double - 16mm, Triple and Quadruple - 25mm

*Bell push switch made to order, contact Customer Services for more details



NBS12

Brushed Steel	Description	Inner Carton	Outer Carton
NBS12	Single, 2 way	5	50
NBS13	Intermediate	5	50
NBS42	Double, 2 way	5	50
NBS43	Triple, 2 way	5	50



APPROVED

10 Amp 3 Pole Fan Isolator

- 10 Amp, triple pole
- Manufactured to IEC 60669-2-4
- Terminal capacity 4 x 1.0mm², 4 x 1.5mm², 2 x 2.5mm² & 1 x 4.0mm²
- Captive terminal screws
- Minimum mounting box depth: 16mm



Brushed Steel	Polished Chrome	Black Nickel	Antique Brass	Matt Black	Description	Inner Carton	Outer Carton
NBS15	NPC15	NBN15	NAB15	NFB15	3 pole fan isolator	5	50
NBS15F	NPC15F	NBN15F	-	NFB15F	10 Amp 3 pole fused fan isolator	5	50



13 Amp Fused Connection Units

- Manufactured to BS 1363 part 2
- Terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²
- Minimum mounting box depth 25mm
- Angled colour coded terminals with captive screws



Brushed Steel	Polished Chrome	Black Nickel	Antique Brass	Matt Black	Description	Inner Carton	Outer Carton
NBS50	NPC50	NBN50	NAB50	NFB50	Switched	5	50
NBS52	NPC52	NBN52	NAB52	NFB52	Switched with power indicator	5	50
NBS53	NPC53	NBN53	-	NFB53	Switched with power indicator & cable outlet	5	50
NBS54	NPC54	NBN54	NAB54	NFB54	Unswitched	5	50
NBS55	NPC55	NBN55	-	NFB55	Unswitched with cable outlet	5	50



20 Amp Double Pole Switches

- Manufactured to BS EN 60669-1
- Colour coded terminals with captive angled screws
- Terminal capacity 3 x 2.5mm², 2 x 4.0mm² & 1 x 6.0mm²
- Minimum mounting box depth 25mm



Brushed Steel	Polished Chrome	Black Nickel	Antique Brass	Matt Black	Description	Inner Carton	Outer Carton
NBS31	NPC31	NBN31	NAB31	NFB31	20A DP switch with power indicator	5	50



45 Amp Double Pole Switches

- Cooker Control Units manufactured to BS4177, Double Pole Switches to BS EN 60669-1
- Brushed Steel insert colours = white (W), grey (G) & black (B)
- L & N terminal capacity 4 x 4.0mm², 3 x 6.0mm² & 1 x 16.0mm²
- E terminal capacity 3 x 4.0mm², 2 x 6.0mm² & 1 x 16.0mm²
- Minimum mounting box depth 47mm



NBS70G

Brushed Steel	Polished Chrome	Black Nickel	Antique Brass	Matt Black	Description	Inner Carton	Outer Carton
NBS70W	NPC70W	-	-	-	With 13A socket & power indicators, white insert	5	50
NBS70B	-	NBN70B	NAB70B	NFB70B	With 13A socket & power indicators, black insert	5	50
NBS70G	-	-	-	-	With 13A socket & power indicators, grey insert	5	50
NBS72	NPC72	NBN72	NAB72	NFB72	With power indicator, double plate	5	50
NBS74	NPC74	NBN74	NAB74	NFB74	With power indicator, single plate	5	50

Co-Axial and Satellite Sockets

- Manufactured to BS 5733
- EM = Euro Module configuration
- Co-axial and satellite minimum mounting box depth 25mm
- Triplex minimum mounting box depth 35mm
- Insert colours – Polished Chrome = white, Brushed Steel = grey

*Supplied as kit of Euro Module components



NBN67

Brushed Steel	Polished Chrome	Black Nickel	Antique Brass	Matt Black	Description	Inner Carton	Outer Carton
NBS60	NPC60	NBN60	NAB60	NFB60	Co-axial, single	5	50
NBS61*	NPC61*	NBN61*	NAB61*	NFB61*	Co-axial, double	EM	-
NBS62*	NPC62*	NBN62*	NAB62*	NFB62*	Isolated co-axial, single	EM	-
NBS63*	NPC63*	NBN63*	NAB63*	NFB63*	Isolated co-axial, double	EM	-
NBS64*	NPC64*	NBN64*	NAB64*	NFB64*	Satellite, single	EM	-
NBS65*	NPC65*	NBN65*	NAB65*	NFB65*	Satellite & co-axial, double	EM	-
NBS66*	NPC66*	NBN66*	NAB66*	NFB66*	Diplex TV/FM, double	EM	-
NBS67*	NPC67*	NBN67*	NAB67*	NFB67*	Triplex TV/FM/Sat – screened	EM	-
NBS68*	NPC68*	NBN68*	NAB68*	NFB68*	Triplex TV/FM/Sat + Return & single Tel – screened	EM	-
NBS69*	NPC69*	NBN69*	NAB69*	NFB69*	Quadplex TV/FM/Sat (x2) + Return & single Tel – screened	EM	-

- See our Euro Module range for further Telecom, Data and Co-axial Options

Intelligent Dimmer Switch Push Type

- Intelligent dimmer suitable for LED, halogen and incandescent lamps
- Soft start, smooth dimming control and silent operation
- 2 Way push on/off with rotary control
- Overload protection
- Clearly marked terminals with backed out captive screws for easy installation
- Terminal capacity 3 x 1mm², 2 x 1.5mm² & 1 x 2.5mm²
- Manufactured to BS EN 60669-2-1
- Minimum mounting box depth 25mm
- 220-240V AC



NFB81

Brushed Steel	Polished Chrome	Black Nickel	Antique Brass	Matt Black	Description	Inner Carton	Outer Carton
NBS81	NPC81	NBN81	NAB81	NFB81	Single, 2 way, push on/off	5	50
NBS82	NPC82	NBN82	NAB82	NFB82	Double, 2 way, push on/off	5	50
NBS83	NPC83	NBN83	-	NFB83	Triple, 2 way, push on/off	5	50
NBS84	NPC84	NBN84	-	NFB84	Quadruple, 2 way, push on/off	5	50

Shaver Socket


- Manufactured to BS EN 61558-1 and BS EN 61558-2-5
- Mounting box depth 47mm
- Terminal capacity 3 x 2.5mm² & 2 x 4.0mm²
- Insert colours: Polished Chrome = white (W), Brushed Steel = grey (G), Black Nickel = black (B), e.g. NAB20B




Brushed Steel	Polished Chrome	Black Nickel	Antique Brass	Matt Black	Description	Inner Carton	Outer Carton
NBS20W	NPC20W	-	-	-	115/240V dual voltage, white insert	5	50
NBS20G	-	-	-	-	115/240V dual voltage, grey insert	5	50
NBS20B	-	NBN20B	NAB20B	NFB20B	115/240V dual voltage, black insert	5	50

Blank Plates

- Ideal for safely covering unused electrical connections
- Manufactured to BS 5733
- Fitted with earth terminal

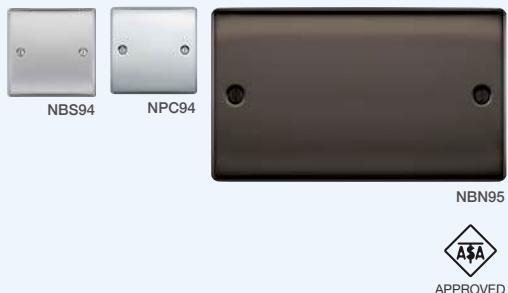

Brushed Steel	Polished Chrome	Black Nickel	Antique Brass	Matt Black	Description	Inner Carton	Outer Carton
NBS94	NPC94	NBN94	NAB94	NFB94	Single	5	50
NBS95	NPC95	NBN95	NAB95	NFB95	Double	5	50

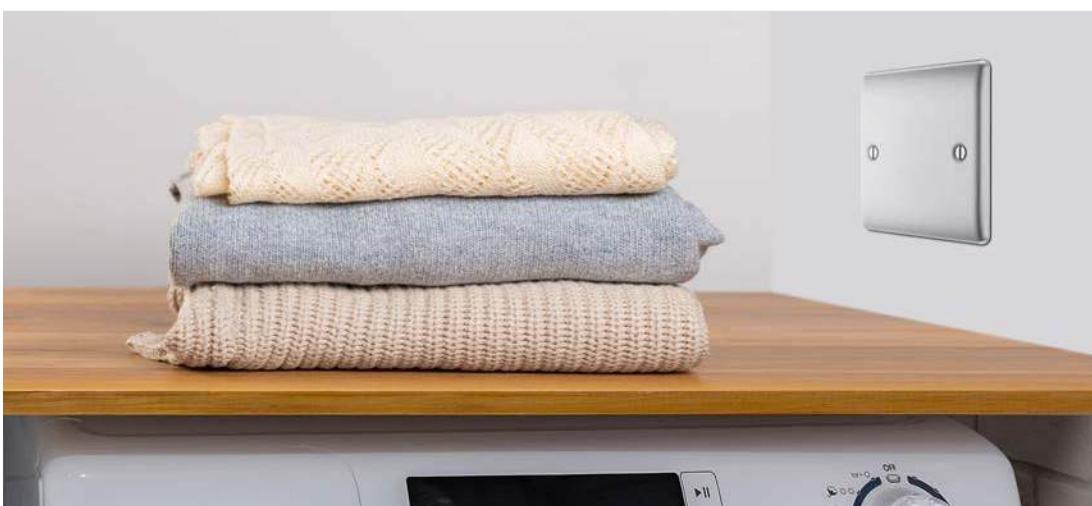

Nexus Metal is available in five stocked finishes:

**Spare Accessories**

Product Code	Description	Inner Carton	Outer Carton
NFS19/10	M3.5 x 19mm screws, pack of 10 (for chrome + steel)	100	1000
NFS28/10	M3.5 x 28mm screws, pack of 10 (for chrome + steel)	50	500
NFS38/10	M3.5 x 38mm screws, pack of 10 (for chrome + steel)	50	500
NFS38/10BR	M3.5 x 38mm screws, pack of 10 (for brass)	20	200
NFS50/10	M3.5 x 50mm screws, pack of 10 (for chrome + steel)	20	200
NFS75/10	M3.5 x 75mm screws, pack of 10 (for chrome + steel)	20	200



20 Amp 20AX Switches

- IP66 rated
- Captive terminal screws
- Switches manufactured to BS EN 60669-1
- Terminal capacity 4x 1.0mm², 4x 1.5mm², 2x 2.5mm² & 1x 4.0mm²
- Supplied with multiple knock-out mounting box
- Indicator that can be wired to illuminate when off or on



Product Code	Description	Outer Carton
WP12	Single, 2 way	10
WP42	Double, 2 way	10

13 Amp Switched Socket Outlets

- IP66 rated with plug in use, cover sealed
- 13A sockets manufactured to BS 1363-2:2016+A1:2018
- Switched sockets with power indicator
- Terminal capacity 3x 2.5mm², 3x 4.0mm² & 2x 6.0mm²
- Supplied with multiple knock-out mounting box
- WP21 complies with BS1363/EV, suitable for use with EV chargers



Product Code	Description	Outer Carton
WP21	Single, 13 Amp, switched	10
WP22	Double, 13 Amp, switched	10

Smart 13A Switched Outdoor Socket

- Control and schedule power outdoors via touch, voice commands or App
- Operates using your home Wi-Fi network on 2.4GHz
- Set timer schedules, countdown function or random security options
- Compatible with Google Home, Amazon Alexa, Siri Shortcuts and IFTTT
- Ideal for operating outdoor lights and water features
- Individual socket control
- IP66 rated, seals plugs in use
- Terminal capacity 3x 2.5mm², 3x 4.0mm² & 2x 6.0mm²
- Manufactured to BS1363-2



Product Code	Description	Outer Carton
WP22/HC	Double, 13 Amp, SP, switched	10

13 Amp Type A RCD Protected Socket Outlet

- IP66 rated with plug in use, cover sealed
- Cuts off power safely and prevent electrocution in event of a fault
- Latching operation, socket returns to original state when power resumes
- Supplied with multiple knock-out mounting box
- Manufactured to BS 1363-2:2016+A1:2018 & BS 7288
- Type A RCD 30mA trip current, 40ms trip speed
- Socket terminal capacity 3x 2.5mm², 3x 4.0mm² & 2x 6.0mm²



Product Code	Description	Outer Carton
WP22ARCD	Double, 13 Amp, RCD switched (latching)	10

**Outdoor Power Kit**

- IP66 rated with plug in use
- Easy to install outdoor socket
- For temporary installation only
- 3m cable with prepared wires to plug
- Pre-wired double, 13A switched socket manufactured to BS 1363-2:2016+A1:2018 (socket), BS 7071 (RCD plug)
- Easy to wire RCD plug, non-latching, 30mA trip current, 40ms trip
- Terminal capacity 3x 2.5mm² 3x 4mm² 2x 6.0mm²



Product Code	Description	Outer Carton
WP22KIT/3	Double, 13 Amp, switched socket with 3m flex and RCD plug	10

**Now even easier to install and operate:**

- Fast-fix – no separate screws, no screw covers, 150° rotation
- Quick release front plate with 1/4 turn fixing for easier installation
- Patented cable entry prevents accidental opening of the cover
- Redesigned paddles with smoother operation, for easier use
- Wi-Fi extender and Smart versions also available



13 Amp Switched Socket with Fast Charge USB A + C (22W)

- Ideal for charging smartphones, tablets, power banks and portable gaming devices
- Smart charging with variable voltage - only delivers the power that your device needs, without overcharging
- Supports PD & QC charging protocols for Android and iOS devices (when using a certified cable)
- Power shared across two ports (22W)
- Twin earth fitted as standard
- Terminal capacity 3x 2.5mm², 3x 4.0mm² & 2x 6.0mm²
- 10 year guarantee




MC522UAC22

Product Code	Description	Inner Carton	Outer Carton
MC522UAC22	13A Double Socket with USB A + C (22W)	5	50

20 Amp 16AX Plate Switches

- Manufactured to BS EN 60669-1
- Mounting box with 1x 20mm knockouts in each side and rear face
- Terminal capacity 4x 1.0mm², 4x 1.5mm² 2x 2.5mm² & 1x 4.0mm²
- Backed out captive screws for easy installation

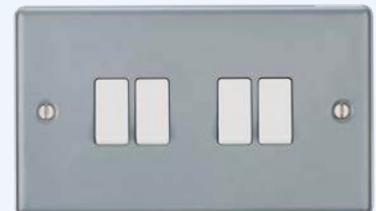

MC544

Product Code	Description	Inner Carton	Outer Carton
MC512	Single, 2 way	10	50
MC513	Intermediate	10	50
MC542	Double, 2 way	10	50
MC543	Triple, 2 way	10	50



MC513

13 Amp Socket Outlets

- Manufactured to BS 1363 part 2
- Terminal capacity 3x 2.5mm², 3x 4.0mm² & 2x 6.0mm²
- Single mounting box with 1x 20mm knockouts in each side and rear face
- Colour coded terminals with backed out captive screws for easy installation



MC522


Product Code	Description	Inner Carton	Outer Carton
MC521	Single DP socket, switched	10	50
MC522	Double DP socket, switched	5	25



MC521

13 Amp RCD Protection

- Maximum load 3120 watts 240V A
- Manufactured to BS 7288:2016
- Terminal capacity 3x 2.5mm², 3x 4.0mm² & 2x 6.0mm²
- Earth terminal in mounting box
- 30 mA trip speed 40ms
- Mounting box with 1x 20mm knockouts in each side and rear face
- Latching type

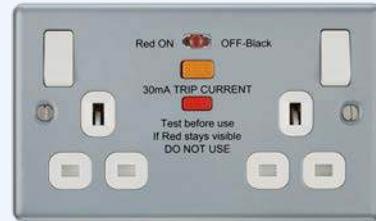

MC522ARCD



MC554RCD

Product Code	Description	Inner Carton	Outer Carton
MC522ARCD	Double, switched socket outlet with Type A RCD	5	25
MC554RCD	Fused connection unit	10	50

13 Amp Fused Connection Units


- Manufactured to BS 1363 part 4
- Mounting box with 1x 20mm knockouts in each side and rear face
- Terminal capacity 3x 2.5mm², 2x 4.0mm² & 1x 6.0mm²
- Removable flex outlet blank
- Colour coded terminals with backed out captive screws for easy installation
- Flush LED power indicator
- Cable entry with cord grip



MC550F

Product Code	Description	Inner Carton	Outer Carton
MC550F	Fused Connection Unit with optional flex outlet	10	50

Features & Benefits

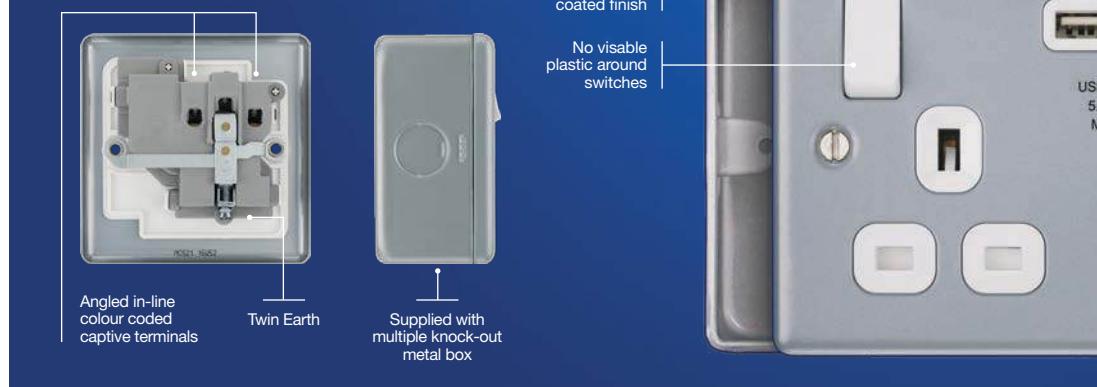

Junction Boxes – Selective Entry

- Manufactured to BS EN 60670
- Selective entries indicated by numbers and symbols on rotating cover
- Moulded in brown or white urea
- Rear entry knockouts in base to facilitate ease of wiring
- Suitable for unbroken ring wire installations
- Lower lip of entries can easily be knocked out to take twin cables
- Robust, generous capacity slot terminals with large grub screws



606 Internal View

606W

Product Code	Description	Inner Carton	Outer Carton
603	3 way, 30 Amp, 89mm/3.25" diameter – brown	10	100
603W	3 way, 30 Amp, 89mm/3.25" diameter – white	10	100
604	4 way, 20 Amp, 80mm/3.25" diameter – brown	10	100
604W	4 way, 20 Amp, 80mm/3.25" diameter – white	10	100
606	6 way, 20 Amp, 89mm/3.25" diameter – brown	10	100
606W	6 way, 20 Amp, 89mm/3.25" diameter – white	10	100

Junction Boxes – Knock-Out Entry

- Manufactured to BS EN 60670
- Suitable for unbroken ring wire installations
- Robust, generous capacity slot terminals with large grub screws
- Small and unobtrusive
- Moulded in brown or white urea



491 Internal View

491

Product Code	Description	Inner Carton	Outer Carton
491	4 way, 20 Amp, 57mm/1.25" diameter – brown	20	200
491W	4 way, 20 Amp, 57mm/1.25" diameter – white	20	200

Junction Boxes – Heavy Duty

- Manufactured to BS EN 60670
- Robust, generous capacity slot terminals with large grub screws
- Moulded in brown urea
- High amperage connector blocks
- Brass terminal block
- Approved to VDE 0606



4100SP

460 (closed and internal)

Product Code	Description	Inner Carton	Outer Carton
4100SP	3 way, 100 Amp, single pole	10	100
4100DP	3 way, 100 Amp, double pole	5	50
460	3 way, 60 Amp, single pole	5	50

Junction Boxes – Lighting

- Manufactured to BS 5733
- Approved BS EN 60998 terminal block
- Mounting holes for horizontal and vertical fixing
- Ideal for use in lighting applications
- Small and unobtrusive
- Approved to VDE 0606



403/405/410

Product Code	Description	Inner Carton	Outer Carton
403	3 way, 3 Amp	20	200
405	3 way, 5 Amp	20	200
410	3 way, 10 Amp	20	200

Steel Knock-Out Boxes

- Manufactured to BS EN 60670-1
- Complete with earth bond terminal




HGS02

HGS04

Product Code	Description	Inner Carton	Outer Carton
HGS01	Single, 16mm deep	20	200
HGS02	Single, 25mm deep	10	100
HGS03	Single, 35mm deep	10	100
HGS04	Double, 25mm deep	5	50
HGS05	Double, 35mm deep	5	50
HGS06	Single, 47mm deep	10	100
HGS07	Double, 47mm deep	5	50

Dry Lining Boxes

- Chemical resistant
- Manufactured from ABS
- Circular base knock-out size 25mm

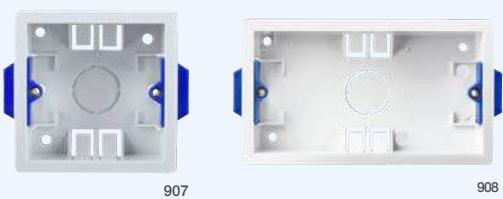

907

908

Product Code	Description	Inner Carton	Outer Carton
907	Single, 35mm	10	100
908	Double, 35mm	5	50
917	Single, 47mm	10	100
918	Double, 47mm	5	50

Fuses – Bulk Pack

- Manufactured to BS 1362



Product Code	Description	Inner Carton	Outer Carton
F103	3 Amp in packs of 10	10	100
F105	5 Amp in packs of 10	10	100
F1013	13 Amp in packs of 10	10	100

Connector Strips

- Manufactured from thermoplastic
- Unique 'snap-off' spine design
- Maximum continuous temperature rating 80°C
- Nominal voltage 400V
- Fully backed-out screws to speed installations
- Manufactured to BS EN 60998-2-1



TS30/6

Product Code	Description	Inner Carton	Outer Carton
TS5/12/10	5 Amp, 12 way – pack of 10	-	100
TS15/12/10	15 Amp, 12 way – pack of 10	-	48
TS30/12/10	30 Amp, 12 way – pack of 10	-	30
TS60/12/10	60 Amp, 12 way – pack of 10	-	20

Twin & Earth Cable Clips

- For fast installations of cables
- Made from impact resistant UV stabilised polypropylene
- Can withstand high impact together with extremes of heat, cold and acid
- Safety nail bends before breaking – hardened and zinc coated
- Temperature range -40°C to +80°C



CCF6/50

Product Code	Description	Colour	Pack Quantity	Inner Carton	Outer Carton
CCF1/50	Twin and Earth Cable Clips – 1mm	Grey	50	10	100
CCF1.5/50	Twin and Earth Cable Clips – 1.5mm	Grey	50	10	100
CCF2.5/50	Twin and Earth Cable Clips – 2.5mm	Grey	50	10	100
CCF4/50	Twin and Earth Cable Clips – 4mm	Grey	50	10	100
CCF6/50	Twin and Earth Cable Clips – 6mm	Grey	50	10	100
CCF10/50	Twin and Earth Cable Clips – 10mm	Grey	50	10	100

Earth Clamps

- Terminal size A-D (2.5mm²-10mm²)
- Maximum earth conductor 1x 10mm²
- Comply with BS 951



EC141

EC151

Product Code	Description	Colour	Inner Carton	Outer Carton
EC141	Internal 12-32mm	Red	20	200
EC151	External 12-32mm	Blue	20	200

Cable Ties

- Nylon (PA66) cable ties
- Quick and easy to install with high locking & tensile strength
- Continuous operating temperature -40°C to +85°C
- Halogen free, LSF (Low Smoke & Fume)




CT150X3.8B/100

Product Code	Description	Colour	Pack Quantity	Inner Carton	Outer Carton
CT150X3.8B/100	Length: 150mm, Width: 3.8mm	Black	100	-	200
CT200X4.8B/100	Length: 200mm, Width: 4.8mm	Black	100	-	120
CT300X4.8B/100	Length: 300mm, Width: 4.8mm	Black	100	-	100
CT370X4.8B/100	Length: 370mm, Width: 4.8mm	Black	100	-	60
CT450X8B/100	Length: 450mm, Width: 8mm	Black	100	-	30

Insulation Tape

- Tape Manufactured to BS 60454
- Flame retardant PVC
- Strong and durable

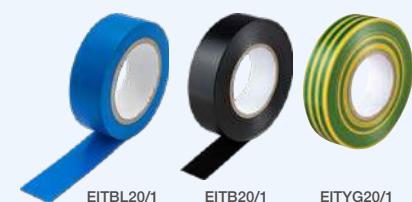

EITBL20/1

EITB20/1

EITYG20/1

Product Code	Description	Colour	Inner Carton	Outer Carton
EITB20/1	19mm x 20m Reel	Black	10	100
EITW20/1	19mm x 20m Reel	White	10	100
EITR20/1	19mm x 20m Reel	Red	10	100
EITYG20/1	19mm x 20m Reel	Yellow/Green	10	100
EITBL20/1	19mm x 20m Reel	Blue	10	100
EITBR20/1	19mm x 20m Reel	Brown	10	100

Mains Optical Smoke Alarm

The BG mains powered optical smoke alarm is ideal for detecting smoke from smouldering fires whilst minimising false alarms. This alarm can be interconnected with the wider range of BG interconnected alarms for complete coverage.

- Hard-wired optical smoke alarm wires directly into your home electric system
- Constant monitoring of the air for the presence of smoke
- Interconnecting: connect up to 24 heat and smoke alarms, or up to 12 alarms when including a CO alarm
- Dust cover (included) prevents contamination of the device during installation
- 9V battery backup (battery included) ensures the alarm will operate if mains power is lost
- Hush function allows the alarm to be temporarily silenced
- Test function, fault, and low battery warnings to assist with alarm maintenance
- Alarm volume 85dB(A) at 3m
- Class 2 alarm
- Certified to BS EN 14604:2005/AC:2001, BSI Kitemark number KM 762034
- UKCA and CE certified
- 10-year product lifetime

Product Code	Description	Inner Carton	Outer Carton
SDMOA	Mains optical alarm	6	48



SDMOA



KM 762034

Mains Heat Alarm

The BG mains powered heat alarm is ideal for use in kitchens and other rooms where smoke or steam may be present, and will alert you if there is a significant rise in temperature which may indicate a fire is about to break out. This alarm can be interconnected with the wider range of BG interconnected alarms for complete coverage.

- Hard-wired heat alarm wires directly into your home electric system
- Interconnecting: connect up to 24 heat and smoke alarms, or up to 12 alarms when including a CO alarm
- Dust cover (included) prevents contamination of the device during installation
- 9V battery backup (battery included) ensures the alarm will operate if mains power is lost
- Hush function allows the alarm to be temporarily silenced
- Test function, fault, and low battery warnings to assist with alarm maintenance
- Alarm volume 85dB(A) at 3m
- Class 2 alarm
- Certified to BS 5446-2:2003, BSI Kitemark number KM 645618
- UKCA and CE certified
- 10-year product lifetime

Product Code	Description	Inner Carton	Outer Carton
SDMHA	Mains heat alarm	6	48



SDMHA



KM 645618

Mains Carbon Monoxide Alarm

The BG mains powered CO alarm is designed to detect carbon monoxide gas from any source of combustion and will alert you when it detects dangerous levels of CO in the air. This alarm can be interconnected with the wider range of BG interconnected alarms for complete coverage.

- Hard-wired CO alarm wires directly into your home electric system
- Interconnecting: connect up to 12 alarms
- Dust cover (included) prevents contamination of the device during installation
- 9V battery back up ensures the alarm will operate if mains power is lost
- Hush function allows the alarm to be temporarily silenced
- Test function, fault and low battery warnings to assist with alarm maintenance
- Supplied with base for straight forward installation
- Alarm volume 85dB(A) at 3m
- Type A alarm
- Certified to BS EN 50291-1:2018, BSI Kitemark number KM 616830
- UKCA and CE certified
- 10-year product lifetime

Product Code	Description	Inner Carton	Outer Carton
SDMCO	Mains carbon monoxide alarm	6	48



SDMCO



KM 616830

Battery Optical Smoke Alarm

The BG battery operated optical smoke alarm is ideal for detecting smoke from smouldering fires whilst minimising false alarms.

- Constant monitoring of the air for the presence of smoke
- Low battery mode warns you when the alarm needs replacing
- Suitable for ceiling or wall mounting
- Hush function allows the alarm to be temporarily silenced
- Test and false alarm functions
- Sealed in lithium battery
- Alarm volume 85dB(A) at 3m
- Certified to BS EN 14604:2005
- UKCA and CE certified
- 10-year product lifetime

Product Code	Description	Inner Carton	Outer Carton
SDLLSM	Battery optical smoke alarms	6	48



SDLLSM



Battery CO Alarm

The BG battery operated CO alarm will detect carbon monoxide gas from any source of combustion and will alert you when it detects dangerous levels of CO in the air.

- Low battery mode warns you when the alarm needs replacing
- Suitable for wall mounting
- Hush function allows the alarm to be temporarily silenced
- Test and false alarm functions
- 2 x AA Batteries (included)
- Type B alarm
- Alarm volume 85dB(A) at 3m
- Certified to BS EN 50291-1:2018 and EN 50291-1:2018
- UKCA and CE certified
- 10-year product lifetime

Product Code	Description	Inner Carton	Outer Carton
SDBCO	Battery optical CO alarms	6	48



SDBCO



Mains Combo Smoke/Heat Alarm

This BG Combination Smoke & Heat alarm is ideal for use in loft or attic spaces, and is less prone to false alarms in dusty environments vs. a stand alone smoke alarm. Recommended for use in spaces where photovoltaic installation invertors are fitted. This alarm can be interconnected with the wider range of BG interconnected alarms for complete coverage, and can be tested and silenced remotely when paired with an SDMREM wireless.

- Hardwired alarm with 10 year lithium sealed in back-up battery
- Wireless RF feature allows you to silence and test the alarm remotely using the SDMREM wireless remote
- Interconnecting: connect up to 24 heat and smoke alarms, or up to 12 alarms when including a CO alarm from the BG Interconnected alarms range
- Colour coded terminals for straight forward installation
- Dust cover (included) prevents contamination of the device during installation
- Certified to BS 5446-2:2003 and EN 14604:2005/AC:2008, third party tested and approved by TUV
- 10 year guarantee

Product Code	Description	Inner Carton	Outer Carton
SDMHOA	Mains combo smoke/heat alarm	6	48



SDMHOA



Pendant Sets (T2)

- Large capacity earth terminal with locking terminal screw
- Wiring aperture in base with extra knockout for ease of wiring
- 0.75mm pendant flex heat resistant to BS6141
- Spin-on cover with smooth cable entry for maximum protection of pendant conductor insulation
- Eight "in-line" terminals all with captive screws
- Manufactured to BS67 and BS EN 60598-2-1



666

Product Code	Description	Inner Carton	Outer Carton
666	6" flex and 3" base	10	100
669	9" flex and 3" base	10	100

Batten Holders Enclosed (T2)

- Large capacity earth terminal with locking terminal screw
- Diameter of batten lampholder is 80mm (3")
- T2 temperature rated
- Wiring aperture in base with extra knockout for ease of wiring
- Wired with heat resistant wire
- Base cover can be removed without removing HO skirt
- Manufactured to BS EN 61184



763

767

XXX

Ceiling Switches

- Supplied with approximately 1.5 metres of cord
- Individually bagged
- Manufactured to BS EN 60669-01



802

803

Product Code	Description	Inner Carton	Outer Carton
802	6 Amp 2 way	10	100
803	45 Amp double pole with power indicator	10	100

Decorative Ceiling Roses and Switches

- Supplied with approximately 1.5 metres of cord
- Individually bagged
- Manufactured to BS EN 60669-01



802ST

802CH

Product Code	Description	Inner Carton	Outer Carton
802CH	6 Amp 2 way ceiling switch chrome finish	5	50
802ST	6 Amp 2 way ceiling switch steel finish	5	50

Fluorescent Starters

- Manufactured to BS EN 60155
- All starters are kite marked



FS2

FS125

Product Code	Description	Inner Carton	Outer Carton
FSU	4-80 Watt	10	100
FS2	4-22 Watt single series	10	100
FS125	70, 75, 80, 85, 100-125 Watt	10	100

Fluorescent Starter Specifications

Lamp Type	Wattage	Circuit	FSU	FS125	FS2
150mm	4 W	Single	220/250V	-	110/130V
-	-	Twin Series	-	-	220/250V
225mm	6W	Single	220/250V	-	110/130V
-	-	Twin Series	-	-	220/250V
300mm	8W	Single	220/250V	-	110/130V
-	-	Twin Series	-	-	220/250V
525mm	13W	Single	220/250V	-	-
450mm	15W	Single	220/250V	-	110/130V
-	-	Twin Series	-	-	220/250V
360mm	16W	Single	220/250V	-	110/130V
600mm	18/20W	Single	220/250V	-	110/130V
-	-	Twin Series	-	-	220/250V
Circline	22W	Single	220/250V	-	110/130V
900mm	30W	Single	220/250V	-	-
Circline	32W	Single	220/250V	-	-
600mm	40W	Single	220/250V	-	-
1200mm	36/40W	Single	220/250V	-	-
1500mm	85/80W	Single	220/250V	240/250V	-
1800mm	70/85W	Single	220/250V	240/250V	-
2400mm	100/125W	Single	-	240/250V	-

Main Switch Consumer Units

Double pole isolation ready for MCB & RCBO circuits.

- Main Switch Consumer Unit supplied with 100A Isolator
- Available with type 2 SPD
- Each consumer unit supplied with spare cover blanks
- Lockable covers also available, see accessories section
- Can be configured to circuit requirements using BG wiring kits and devices

Note: Split load configurations, can be created using Main Switch Consumer Unit, RCD and cable kit CUA05.



Product Code	Modules	Ways	Main Switch	SPD Type 2	IP	Cover Blanks
Unpopulated						
CF6M4	6	4	100A	-	IP20	2
CF9M7	9	7	100A	-	IP20	2
CF12M10	12	10	100A	-	IP20	2
CF16M14	16	14	100A	-	IP20	2
CF19M17	19	17	100A	-	IP20	4
CF22M20	22	20	100A	-	IP20	4
Unpopulated + Surge Protection Device						
CF9MS6	9	6	100A	Y	IP20	2
CF12MS9	12	9	100A	Y	IP20	2
CF16MS13	16	13	100A	Y	IP20	2
CF19MS16	19	16	100A	Y	IP20	4
CF22MS19	22	19	100A	Y	IP20	4

RCBO Main Switch Consumer Units – Populated

Allows 30mA RCD protection of individual circuits with the added safety features of short circuit & over current protection incorporated in each device.

- Supplied with unidirectional single pole RCBO's
- Available with type 2 SPD
- Each consumer unit supplied with spare cover blanks
- Complete with 100A Main Switch Isolator



Product Code	Modules	Ways	Main Switch	RCBO's	SPD Type 2	IP	Cover Blanks
Populated + Surge Protection Device							
CF16MPS613	16	13	100A	6	Y	IP20	2
CF16MPS813	16	13	100A	8	Y	IP20	2
CF16MPS1013	16	13	100A	10	Y	IP20	2

Dual RCD Consumer Units – Unpopulated

Allows the installer to split the consumers power needs across two 30mA RCD's, for example lighting and sockets circuits.

- Dual RCD Units supplied with Hi-integrity as standard designed to provide maximum flexibility for protected and unprotected circuits
- Available with type 2 SPD
- Each consumer unit supplied with spare cover blanks
- Lockable covers also available, see accessories section



Product Code	Modules	Ways	Main Switch	RCD	SPD Type 2	IP	Cover Blanks
Unpopulated Main Switch + 100A RCD							
CF19D113	19	13	100A	2x 100A	-	IP20	4

Dual RCD Consumer Units – Populated

Allows the installer to split the consumers power needs across two 30mA RCD's, for example lighting and sockets circuits.

- Supplied complete with MCBs fitted, see table
- Dual RCD Units supplied with Hi-integrity as standard designed to provide maximum flexibility for protected and unprotected circuits
- Each consumer unit supplied with spare cover blanks
- Lockable covers also available, see accessories section
- Available with Surge Protection



Product Code	Modules	Ways	Main Switch	RCD	MCB's	SPD Type 2	IP	Cover Blanks
Populated Main Switch + 80A RCD								
CF12D88P6	12	6	100A	2x 80A	6	-	IP20	2
CF16D88P10	16	10	100A	2x 80A	10	-	IP20	2
CF19D88P13	19	13	100A	2x 80A	10	-	IP20	4
Populated Main Switch, 80A RCD + Surge Protection Device								
CF16D88PS9	16	9	100A	2x 80A	8	Y	IP20	2
CF19D88PS12	19	12	100A	2x 80A	10	Y	IP20	4
CF22D88PS15	22	15	??	??	??	Y	IP20	?

RCD Incomer

A RCD Incomer allows the protection of isolating both poles of the incoming supply with the protection of a 30mA Type A RCD, a great way to add an additional board in workshops, garages, garden offices and sheds.

- RCD consumer unit supplied with 100A Type A RCD
- Each consumer unit supplied with spare cover blanks
- Lockable covers also available, see accessories section
- Available with Surge Protection



Product Code	Modules	Ways	RCD	SPD Type 2	IP	Cover Blanks
Unpopulated + 100A Type A						
CF6R14	6	4	100A	-	IP20	2
CF9R17	9	7	100A	-	IP20	2
CF12R110	12	10	100A	-	IP20	2

Enclosures

Fuse Switch

Can be used for safe isolation of the incoming electrical supply, and as a midpoint isolation unit if the Consumer Unit is more than 3m away from the intake fuse position. Comes with 100A, 80A & 63A fuses. Manufactured in a metal non combustible enclosure, suitable for internal installation.

Product Code	Modules	Main Switch	IP
CFUFS100	4	100A	20



These enclosures provide an easy solution for additional add on circuits for a garage or a new shower installation. Available in IP65 – Weatherproof & IP20 non-weatherproof. Available in empty or part populated formats.

Weatherproof Enclosure

Product Code	Modules	Ways	Main Switch	RCD	MCB's	IP	Cover Blanks
CFE5W	5	5	-	-	-	65	1
CFGAR1A	5	3	-	40A Type A	2	65	1
CFSHOW1A	5	3	-	63A Type A	1	65	2

Non-Weatherproof Enclosure

Product Code	Modules	Ways	Main Switch	RCD	MCB's	IP	Cover Blanks
CFUE4M	4	4	-	-	-	20	2

Weatherproof IP65

- 5 Module enclosures accept SP RCBOs
- IP65 enclosures Ø20mm knockouts on all sides drillable to Ø32mm
- Enclosure kits supplied complete with devices, DIN rail, neutral cable, neutral & earth terminals, cover blanks and busbar

Product Code	Quantity of MCB's	B Curve MCB's Included
CFGAR2	2	6A x 1, 16A x 1



CFGAR2

Non-Weatherproof IP20

- IP20 enclosures suitable for use in indoor, dry locations
- Ø20mm knockouts on all sides drillable to Ø32mm
- Enclosure kits supplied complete with devices, DIN rail, neutral cable, neutral and earth terminals, cover blanks and busbar

Product Code	Quantity of MCB's	B Curve MCB's Included
CFUGAR1A	2	6A x 1, 32A x 1
CFUGAR2	2	6A x 1, 16A x 1
CFUSHOW1A	1	50A x 1



CFUGAR1A

Accessories



Product Code	Description
CUA01	Consumer unit cover blanks to fill unused ways (pack of 10)
CUA02	21 way copper fork busbar (can be easily cut to size)
CUA04	Device style blank, 1 module, fills unused ways in consumer unit

Main Switch – Isolator

- Double Pole
- Bidirectional
- BS7671
- Positive contact status indicator
- Device capable of being locked in 'off' position using a device lock

Product Code	Description	Rating	Modules
CUSW100	Double Pole 100A Main Switch	100A	2



AFDD's - Combined RCBO Type A

- Available in B curve
- Unidirectional
- BS7671
- Single module
- 30mA
- 6kA
- Positive contact status indicator
- Device capable of being locked in 'off' position using a device lock



Double Pole Type A 30mA

B Curve	Description	Rating	Modules
CURAFDB6A	AFDD Type A Unidirectional	6A	1
CURAFDB10A	AFDD Type A Unidirectional	10A	1
CURAFDB16A	AFDD Type A Unidirectional	16A	1
CURAFDB20A	AFDD Type A Unidirectional	20A	1
CURAFDB32A	AFDD Type A Unidirectional	32A	1
CURAFDB40A	AFDD Type A Unidirectional	40A	1

RCBO's

Single Pole Type A 30mA

- Available in B & C curves
- Unidirectional
- BS7671
- Single module
- 30mA
- 6kA
- Positive contact status indicator
- Device capable of being locked in 'off' position using a device lock



B Curve	Description	Rating	Modules	Modules
CUCRB6A	Compact RCBO Type A Unidirectional	6A	1	5
CUCRB10A	Compact RCBO Type A Unidirectional	10A	1	5
CUCRB16A	Compact RCBO Type A Unidirectional	16A	1	5
CUCRB20A	Compact RCBO Type A Unidirectional	20A	1	5
CUCRB32A	Compact RCBO Type A Unidirectional	32A	1	5
CUCRB40A	Compact RCBO Type A Unidirectional	40A	1	5
CURB45A	Tall body RCBO Type A Unidirectional	45A	1	5
CURB50A	Tall body RCBO Type A Unidirectional	50A	1	5
CURB55A	Tall body RCBO Type A Unidirectional	55A	1	5



MCB's

- Available in B & C curves
- Bidirectional
- BS7671
- Single Pole
- 6kA
- Positive contact status indicator
- Device capable of being locked in 'off' position using a device lock



B Curve	Description	Rating	Modules	Per Box
CUMB6	MCB Bidirectional	6A	1	12
CUMB10	MCB Bidirectional	10A	1	12
CUMB16	MCB Bidirectional	16A	1	12
CUMB20	MCB Bidirectional	20A	1	12
CUMB32	MCB Bidirectional	32A	1	12
CUMB40	MCB Bidirectional	40A	1	12
CUMB45	MCB Bidirectional	45A	1	12
CUMB50	MCB Bidirectional	50A	1	12
CUMB55	MCB Bidirectional	55A	1	12



RCD's

Double Pole Type A 30mA

- Bidirectional
- BS7671
- Two module
- 30mA
- 6kA
- Positive contact status indicator
- Device capable of being locked in 'off' position using a device lock

Product Code	Description	Rating	Modules
CUR6330A	Compact RCD Type A Bidirectional	63A	2
CUR8030A	Compact RCD Type A Bidirectional	80A	2



Double Pole Type A 100mA

- Bidirectional
- BS7671
- Two module
- 100mA
- 6kA
- Positive contact status indicator
- Device capable of being locked in 'off' position using a device lock

Product Code	Description	Rating	Modules
CUR100100A	Compact RCD Type A Bidirectional	100A	2



Control Devices

- Wide range of additional control devices for installation into a consumer unit or enclosure

Product Code	Description	Modules
CUC20	Contactor 20A, Double pole, AC coil	1
CUC40	Contactor 40A, Double pole, AC coil	2
CUB1	Bell transformer, 240V AC to 24,12.8V AC	2
CUTS1	Time delay switch 1 - 20mins delay	2
CUTS10	Digital timer, 7 day, 1 channel	2
CUTS11	Digital timer, 7 day, 2 channel	2




Rotary Isolators

AC Rotary Isolators

- Plastic construction
- IP65
- Red/Yellow padlockable handle
- Earth terminals included
- Easy cable access via M20 knockouts (top and bottom)
- Captive retained cover screws
- Switch interlocked with lid to prevent opening in ON position
- Manufactured and tested BS EN 60947-3

4 Pole	Description
CPRSD416	16A Rotary Isolator IP65
CPRSD420	20A Rotary Isolator IP65
CPRSD425	25A Rotary Isolator IP65
CPRSD432	32A Rotary Isolator IP65
CPRSD440	40A Rotary Isolator IP65
CPRSD463	63A Rotary Isolator IP65
CPRSD4100	100A Rotary Isolator IP65

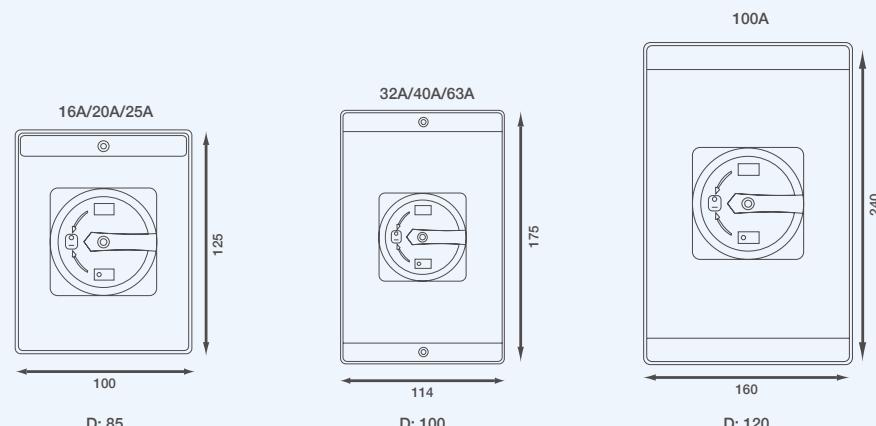

DC Rotary Isolators

- Plastic construction
- IP66
- Black Padlockable handle
- -25°C to +85°C operating temperature
- Isolation of 1 or 2 PV strings
- Easy cable access via 12mm to 25mm knockouts (top and bottom)
- Switch interlocked with lid to prevent opening in ON position
- Captive and retained cover screws
- Designed as an one size enclosure; 4P (4P connected as 2p jumper links are included)
- Manufactured and tested IEC 60947-3

Product Code	Description
CPDC425	25A Rotary Isolator IP66
CPDC432	32A Rotary Isolator IP66



Socketed Mode 2 Chargers

- Wi-Fi & Ethernet as standard, with options for 4G and RFID
- Type 2 connection
- Single Phase 7.4kW and Three Phase 22kW models
- Interchangeable front fascia, change the shade or colour!
- Suitable for residential and commercial use
- Two base and rear entry points for ease of install
- Full smart functionality and OCPP 1.6J connectivity
- No earth rod required – integrated open PEN conductor protection
- Type A RCD (30mA AC + 6mA DC)
- Integrated Class C power meter, with option for external MID meter
- Compatible with EV Stands from Sync Energy and EV Tower with Sync Energy mounting plate

SINGLE PHASE 7.4kW

Product Code	Type
EWC2S7G	Wi-Fi + Ethernet (incl. CT clamp)
EWC2S7GG	Wi-Fi + Ethernet + 4G* (incl. CT clamp)
EWC2S7GGR	Wi-Fi + Ethernet + 4G*+ RFID (incl. CT clamp)

*4G data period is for 3 years, see our website for more information



Tethered Mode 2 Chargers

- Wi-Fi & Ethernet as standard, with options for 4G and RFID
- Tethered Type 2 connection with 7.5m of cable
- Single Phase 7.4kW
- Interchangeable front fascia, change the shade or colour!
- Suitable for residential and commercial use
- Two base and rear entry points for ease of install
- Full smart functionality and OCPP 1.6J connectivity
- No earth rod required – integrated open PEN conductor protection
- Type A RCD (30mA AC + 6mA DC)
- Integrated Class C power meter, with option for external MID meter
- Compatible with EV Stands from Sync Energy and EV Tower with Sync Energy mounting plate

SINGLE PHASE 7.4kW

Product Code	Type
EWC2T7G	Wi-Fi + Ethernet, 7.5m cable (incl. CT clamp)
EWC2T7GG	Wi-Fi + Ethernet + 4G*, 7.5m cable (incl. CT clamp)

*4G data period is for 3 years, see our website for more information



Three Phase Chargers

- Single Type 2 Socket Outlet with auto-lock
- Dynamic charging – up to 22kW (32A)
- Interchangeable front fascia
- Designed for ease of installation with two base and one rear entry points
- Fully compliant with the latest Electric Vehicles (Smart Charge Points) Regulations
- Full smart functionality and OCPP 1.6J connectivity
- Compatible EVASTAND12S and EVASTAND12T EV Stands, offering flexibility in installation options.
- DIMENSIONS: 305 (H) x 201 (W) x 115 (D)

SINGLE PHASE 22kW

Product Code	Type
EWC2S22GGR	Single Socketed – Three Phase



Wall Charger 2 coloured front covers

- Choose from a range of 9 colours
- Easy to fit DIY swap
- Universal fit for Socketed or Tethered Wall Charger 2 chargers

Product Code	Description
EWC2TPTW	Traffic White
EWC2TPSG	Signal Grey
EWC2TPSY	Sandstone Yellow
EWC2TPSR	Signal Red
EWC2TPJB	Jet Black
EWC2TPBG	Blue Grey
EWC2TPDB	Deep Blue
EWC2TPRG	Racing Green



EV stands

- EV Stands available as single or twin, suitable for Wall Charger 1 and 2
 - 3mm Galvanised steel, finished in RAL 7016 Anthracite Grey
 - 1210 (H) X 100 (W) X 50 (D)mm



EVASTAND12S EVASTAND12T

Product Code	Description
EVASTAND12S	Charger Stand – Single
EVASTAND12T	Charger Stand – Twin

Internal IP20



Product Code	Description	Finish
CFUEV5A	5 Mod – 40A 30mA Type A RCD – 40A MCB – Type 2 SPD	White
CFUEV6	5 Mod – 100A Main Switch – 40A MCB – Type 2 SPD	White



Pro Charger Twin Socket Bollard Floor-Mounted

- Twin Type 2 Socket Outlets
- Backlit Intuitive Colour Touchscreen
- On Screen & RGB LED Charge Status Indicator
- IP65 and IK10¹ rated durable Die-Cast Aluminium and Galvanised steel construction
- Supports Monta QR Code, RFID, Plug & Charge, and Payment Terminal Charging
- Built-in 4G Connectivity, MCB and MID meters as standard
- PAS 1899 Compliant design, ensuring accessible charging
- 5-year on-site Warranty
- Three Phase with 1x22kW or 2x11kW Max Output
- Single Phase with 2x7.4kW Max Output
- Available with Integrated LED Amenity Light²
- Contactless Card Terminal option for easy tap and go payments
- Dimensions:
 - Floor-Mounted No Light: 1300 (H) x 263 (W) x 263 (D)
 - Floor-Mounted With Light: 1422 (H) x 265 (W) x 265 (D)

¹IK10 Body, IK08 Screen

²Lighting design files available on request

TWIN BOLLARD WITH LIGHT

Product Code	Type
EVPCFSM211LBGRP	Three Phase + Payment Terminal
EVPCFSM211LBGR	Three Phase
EVPCFSM27LBGRP	Single Phase + Payment Terminal
EVPCFSM27LBGR	Single Phase

TWIN BOLLARD

Product Code	Type
EVPCFSM211NBGRP	Three Phase + Payment Terminal
EVPCFSM211NBGR	Three Phase
EVPCFSM27NBGRP	Single Phase + Payment Terminal
EVPCFSM27NBGR	Single Phase



Pro Charger Twin Socket Wall-Mounted

- Twin Type 2 Socket Outlets Backlit Intuitive Colour Touchscreen
- On Screen & RGB LED Charge Status Indicator
- IP65 and IK10¹ rated durable Stainless Steel and UV resistant Polycarbonate Construction
- Supports Monta QR Code, RFID, Plug & Charge and Payment Terminal Charging
- Built-in 4G Connectivity, MCB and MID meters as standard
- PAS 1899 Compliant design, ensuring accessible charging
- 5-year on-site Warranty
- Three Phase with 1x22kW or 2x11kW Max Output
- Single Phase with 2x7.4kW Max Output
- Contactless Card Terminal option for easy tap and go payments
- Dimensions:
 - Twin Wall-Mounted: 625 (H) x 333 (W) x 210 (D)

¹IK10 Body, IK08 Screen



Product Code	Type
EVPCWSM211BGRP	Three Phase + Payment Terminal
EVPCWSM211BGR	Three Phase
EVPCWSM27BGRP	Single Phase + Payment Terminal
EVPCWSM27BGR	Single Phase

Portable EV Chargers

Perfect for travelling to destinations that only offer a standard 13A plug socket, suitable for all plug-in electric vehicles.

- Provides safe and intelligent portable EV charging for all plug-in electric vehicles
- Perfect for travelling to destinations that only offer a domestic (13A UK 3 pin) socket
- UK 3 pin plug to Type 2 EV plug
- Charges up-to 10A, 2.4kW – up-to 8 miles per charging hour
- 5 or 10 metres of high-performance cable
- IP65 rated (Control box) – IP65 when connected to vehicle, IP55 when not in use and end-cap applied
- LED charging status indicator
- 3 Year warranty



Product Code	Type	Length
EVCM22135	UK 3 Pin – Type 2	5m
EVCM221310	UK 3 Pin – Type 2	10m

EV Charging Cables

- Single-Phase and Three-Phase Mode 3 Type 2 to Type 2 charging cables
- Robust construction with connector guard caps/protectors
- Suitable for 16 and 32A sockets
- 7.4kW / 250V~ & 22kW / 480V~
- Weather-resistant IP65 when connected to vehicle. IP55 when not in use and end caps applied
- High specification, UV stable cable
- Meets EN 50620, IEC 62196-2 standards
- 3 Year warranty



Product Code	Type	Length
EVC22325SL	TYPE 2 – TYPE 2	5m
EVC22328SL	TYPE 2 – TYPE 2	8m
EVC223210SL	TYPE 2 – TYPE 2	10m
EVC22325TL	TYPE 2 – TYPE 2 3-PHASE	5m
EVC22328TL	TYPE 2 – TYPE 2 3-PHASE	8m

Cable Carry Case

- Keeps EV charging cables neat and tidy
- Lightweight and easy to carry
- Zipped opening with durable polyester construction
- Suitable for use with Type 1 and Type 2 Mode 3 EV charge cables, and Mode 2 charger cables
- 410mmØ
- 10kg Weight Capacity
- 1 Year manufacturer warranty



Product Code	Description
EVCASE	Cable carry case



BASICS

Single Socket Extension Lead

- One socket – allows you to extend the reach of your outlet
- Socket safety shutter – prevents the insertion of foreign objects
- Modern – rounded slimline appearance
- Trusted quality – manufactured and certified to BS1363-2
- Fitted with a 13A fused plug – maximum load 3120W, 240V AC



Cat No	Cable Length	Rating	Sockets	Colour	Carton Qty
BOG5-MP	5m	13A	1	White	10
BOG10-MP	10m	13A	1	White	20



Double Socket Extension Lead

- Two sockets – allows you to connect two items safely into one outlet
- Socket safety shutters – prevents the insertion of foreign objects
- Modern – rounded slimline appearance
- Trusted quality – manufactured and certified to BS1363-2
- Fitted with a 13A fused plug – maximum load 3120W, 240V AC



Cat No	Cable Length	Rating	Sockets	Colour	Carton Qty
BTG5N-MP	5m	13A	2	White	8
BTN10N-MP	10m	13A	2	White	10

'BTN10N-MP is with an indicator



Four Socket Extension Lead

- Four sockets – allows you to connect four items safely into one outlet
- Socket safety shutters – prevents the insertion of foreign objects
- Modern – rounded slimline appearance
- Wall-fixing capability – for an 'off the floor' neat and tidy solution
- Trusted quality – manufactured and certified to BS1363-2
- Fitted with a 13A fused plug – maximum load 3120W, 240V AC



Cat No	Cable Length	Rating	Sockets	Colour	Carton Qty
BFG110N-MP	1m	13A	4	White	25
BFG210N-MP	2m	13A	4	White	20
BFG3N-MP	3m	13A	4	White	20
BFG5N-MP	5m	13A	4	White	20



BASICS

Six Socket Extension Lead

- Six sockets – allows you to connect six items safely into one outlet
- Socket safety shutters – prevents the insertion of foreign objects
- Modern – rounded slimline appearance
- Wall-fixing capability – for an 'off the floor' neat and tidy solution
- Trusted quality – manufactured and certified to BS1363-2
- Fitted with a 13A fused plug – maximum load 3120W, 240V AC



Cat No	Cable Length	Rating	Sockets	Colour	Carton Qty
BSG110N-MP	1m	13A	6	White	20
BSG210N-MP	2m	13A	6	White	20
BSG3N-MP	3m	13A	6	White	15



Eight Socket Extension Lead

- Eight sockets – allows you to connect eight items safely into one outlet
- Socket safety shutters – prevents the insertion of foreign objects
- Power indicator – shows that power is connected and the socket is ready for use
- Wall-fixing capability – for an 'off the floor' neat and tidy solution
- Trusted quality – manufactured and certified to BS1363-2
- Fitted with a 13A fused plug – maximum load 3120W, 240V AC



Cat No	Cable Length	Rating	Sockets	Colour	Carton Qty
BEN210-MP	2m	13A	8	White	10




Rewireable Trailing Socket

- One, two, four or six sockets – allows you to connect multiple products into one outlet
- Socket safety shutters – prevents the insertion of foreign objects
- Power indicator (TN, UG and SXG) – shows that power is connected and the socket is ready for use
- Rewireable – for a custom solution
- Wall-fixing capability (UG and SXG) – for an 'off the floor' neat and tidy solution
- Robust – manufactured from high quality ABS
- Trusted quality – manufactured and certified to BS1363-2



Cat No	Rating	Sockets	Colour	Pack Qty	Carton Qty
SS-MP	13A	1	White	10	100
TN-MP	13A	2	White	-	20
UG-MP	13A	4	White	-	10
SXG-MP	13A	6	White	-	10

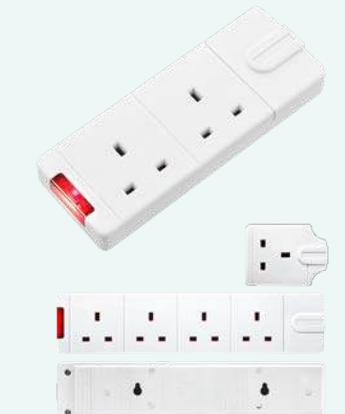



BASICS

Rewireable Plug

- Solid brass sleeved pins – prevents contact when the plug pins are live
- Rewireable – for a custom solution
- Trusted quality – manufactured and certified to BS1363
- 3, 5 or 13A rated – suitable up to 3120W
- Available in black or white
- Ideal for indoor power applications
- Moulded handle (PT13HW) – makes removing the plug easy



Cat No	Fused	Colour	Pack Qty
PT13W-01	13A	White	20
PT13B-01	13A	Black	20



Shaver Adaptor

- Connect a electric shaver or toothbrush – to a standard 3 pin mains socket
- Solid brass sleeved round pins – prevents contact when the plug pins are live
- Trusted quality – manufactured and certified to BS1363-3
- Fitted with a replaceable 1A fuse



Cat No	Fused	Colour	Pack Qty
SHADC-MP	1A	White	5



SWITCHED

Switched Extension Lead


- Four or six sockets – allows you to connect multiple items safely into one outlet
- Individually switched – allows you to control the power to each socket
- Socket safety shutters – prevents the insertion of foreign objects
- Modern – rounded slimline appearance
- Wall-fixing capability – for an 'off the floor' neat and tidy solution
- Trusted quality – manufactured and certified to BS1363-2
- Fitted with a 13A fused plug – maximum load 3120W, 240V AC



Cat No	Cable Length	Rating	Sockets	Colour	Carton Qty
SWC4210N-MP	2m	13A	4	White	10
SWC6210N-MP	2m	13A	6	White	10

Compact Switched Extension Lead

- Three sockets – allows you to connect three items safely into one outlet
- Socket safety shutters – prevents the insertion of foreign objects
- Individually switched – control the power to each socket
- Individual power indicators – shows which device is connected to the mains
- Vertically orientated sockets – for a neat and tidy solution
- Two metres of cable – to extend the reach of the socket
- Wall-fixing capability – for an 'off the floor' neat and tidy solution
- Trusted quality – manufactured and certified to BS1363-2

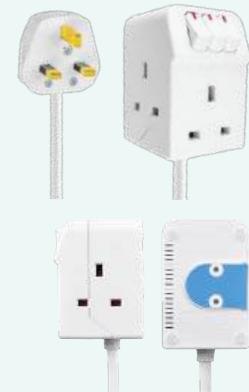

Cat No	Cable Length	Rating	Sockets	Colour	Carton Qty
SWG3210C-MP	2m	13A	3	White	10



SURGE

Surge Extension Lead

- Four or six sockets – allows you to connect multiple items safely into one outlet
- Surge protected – protection from the damaging effects of surges and spikes
- Power and surge Indicator – shows that the sockets are connected and protected
- Connected equipment warranty – 3 years, £1,000 value
- Socket safety shutters – prevents the insertion of foreign objects
- Modern – rounded slimline appearance
- Wall-fixing capability – for an 'off the floor' neat and tidy solution
- Trusted quality – manufactured and certified to BS1363-2
- Fitted with a 13A fused plug – maximum load 3120W, 240V AC



Cat No	Cable Length	Rating	Sockets	Colour	Carton Qty
SRG4210N-MP	2m	13A	4	White	10
SRG44N-MP	4m	13A	4	White	8
SRG6210N-MP	2m	13A	6	White	10



Eight Socket Surge Extension Lead

- Eight sockets – allows you to connect eight items safely into one outlet
- Surge protected – protection from the damaging effects of surges and spikes
- Power and surge Indicator – shows that the sockets are connected and protected
- Connected equipment warranty – 3 years, £1,000 value
- Socket safety shutters – prevents the insertion of foreign objects
- Wall-fixing capability – for an 'off the floor' neat and tidy solution
- Trusted quality – manufactured and certified to BS1363-2
- Fitted with a 13A fused plug – maximum load 3120W, 240V AC



Cat No	Cable Length	Rating	Sockets	Colour	Carton Qty
SRG8210N-MP	2m	13A	8	White	10



Individually Switched Surge Extension Lead

- Four or six sockets – allows you to connect multiple items safely into one outlet
- Surge protected – protection from the damaging effects of surges and spikes
- Power and surge Indicator – shows that the sockets are connected and protected
- Connected equipment warranty – 3 years, £1,000 value
- Individually switched – allows you to control the power to each socket
- Socket safety shutters – prevents the insertion of foreign objects
- Modern – rounded slimline appearance
- Wall-fixing capability – for an 'off the floor' neat and tidy solution
- Trusted quality – manufactured and certified to BS1363-2
- Fitted with a 13A fused plug – maximum load 3120W, 240V AC



Cat No	Cable Length	Rating	Sockets	Colour	Carton Qty
SWSRG4210N-MP	2m	13A	4	White	10
SWSRG6210N-MP	2m	13A	6	White	10




SURGE

Compact Surge Extension Lead

- Three sockets – allows you to connect three items safely into one outlet
- Surge protected – protection from the damaging effects of surges and spikes
- Power and surge Indicator – shows that the sockets are connected and protected
- Connected equipment warranty – 3 years, £1,000 value
- Socket safety shutters – prevents the insertion of foreign objects
- Individually switched – control the power to each socket
- Individual power indicators – shows which device is connected to the mains
- Vertically orientated sockets – for a neat and tidy solution
- Two metres of cable – to extend the reach of the socket
- Wall-fixing capability – for an 'off the floor' neat and tidy solution
- Trusted quality – manufactured and certified to BS1363-2



Cat No	Cable Length	Rating	Sockets	Colour	Carton Qty
SWSRG3210C-MP	2m	13A	3	White	10

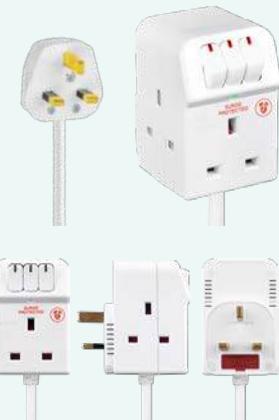

Surge Tower Extension Lead

- Ten sockets – allows you to connect ten items safely into one outlet
- Surge protected – protection from the damaging effects of surges and spikes
- Power and surge indicator – shows that the sockets are connected and protected
- Connected equipment warranty – 3 years, £1,000 value
- Socket safety shutters – prevents the insertion of foreign objects
- Horizontal or vertical – space saving mounting options
- Trusted quality – manufactured and certified to BS1363-2
- Fitted with a 13A fused plug – maximum load 3120W, 240V AC



Cat No	Cable Length	Rating	Sockets	Colour	Carton Qty
SRGTOW10110-MP	1m	13A	10	White	5



Individually Switched Surge Adaptor

- Three sockets – allows you to connect three items safely into one outlet
- Surge protected – protection from the damaging effects of surges and spikes
- Power and surge indicator – shows that the sockets are connected and protected
- Connected equipment warranty – 3 years, £1,000 value
- Socket safety shutters – prevents the insertion of foreign objects
- Individually switched – control the power to each socket
- Individual power indicators – shows which device is connected to the mains
- Vertically orientated sockets – for a neat and tidy solution



Cat No	Rating	Sockets	Pack Qty
MSWRG3-MP	13A	3	5






USB

Extension Lead with USB

- Four or six sockets – allows you to connect multiple items safely into one outlet
- Socket safety shutters – prevents the insertion of foreign objects
- One metre of cable – to extend the reach of the socket
- Wall-fixing capability – for an 'off the floor' neat and tidy solution
- Trusted quality – manufactured and certified to BS1363-2
- Power indicator – shows that power is connected and the socket is ready for use
- Two USB ports – (10.5W shared) to power and charge your devices
- 13A fused plug – maximum load 3120W, 240V AC




Cat No	Cable Length	USB Output	Rating	Sockets	Colour	Carton Qty
BFNUAC10110N-MP	1m	10.5W	13A	4	White	10

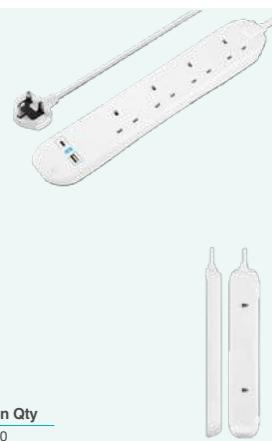**Surge Extension Lead with USB**

- Four or six sockets – allows you to connect multiple items safely into one outlet
- Surge protected – protection from the damaging effects of surges and spikes
- Power and surge indicator – shows that the sockets are connected and protected
- Connected equipment warranty – 3 years, £1,000 value
- Two USB ports – (10.5W shared) to power and charge your devices
- Socket safety shutters – prevents the insertion of foreign objects
- Modern – rounded slimline appearance
- Wall-fixing capability – for an 'off the floor' neat and tidy solution
- Trusted quality – manufactured and certified to BS1363-2
- Fitted with a 13A fused plug – maximum load 3120W, 240V AC



Cat No	Cable Length	USB Output	Rating	Sockets	Colour	Carton Qty
SRGUAC104210N-MP	2m	10.5W	13A	4	White	10
SRGUAC1044N-MP	4m	10.5W	13A	4	White	10
SRGUAC106210N-MP	2m	10.5W	13A	6	White	10

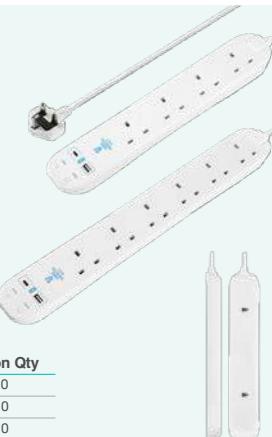**USB Compact Extension Lead**

- Three sockets – allows you to connect three items safely into one outlet
- Two metres of cable – to extend the reach of the socket
- Two USB ports – (10.5W shared) to power and charge your devices
- Socket safety shutters – prevents the insertion of foreign objects
- Vertically orientated sockets – for a neat and tidy solution
- Wall-fixing capability – for an 'off the floor' neat and tidy solution
- Trusted quality – manufactured and certified to BS1363-2



Cat No	Cable Length	USB Output	Rating	Sockets	Colour	Carton Qty
B3UAC10210-MP	2m	10.5W	13A	3	White	10



USB

20W USB C Fast Charger

- Powerful USB Charging – Delivering a 20W output, this is an ideal solution for fast charging your mobile phones
- Fast Charging for Mobile Devices – Charge your iPhone 15 from 0-50% in 30 minutes – 3x faster than the original 5W charger
- Wide Compatibility – With a USB C port, you can fast charge your latest and legacy devices effortlessly
- Advanced Technology – Supporting Power Delivery (PD) 3.0, Qualcomm Quick Charge (QC) 3.0 and other leading protocols ensures the latest devices can benefit from the fast and smart charging capabilities
- Programmable Power Supply – PPS technology provides an optimised experience by adapting the power, charging at safer and more efficient speeds, and extending the device's battery life and health
- Compact and Portable – Making it easy to pack away, ensuring you have a reliable power source whether you are travelling, in the office or at home
- Ultra Slim Design – Providing a great solution when using behind bedside tables, chests of drawers, and console tables
- Safety First – With built-in protection, your device remains safe from overcurrent, overvoltage, short-circuiting or overheating

Cat No	USB Output	Colour	Pack Qty
USBPLGC20W-MP	20W	White	5

**30W USB A + C Fast Charger**

- Powerful USB Charging – Delivering a 30W output, this is an ideal solution for fast charging your mobile phones and tablets
- Power and Charge 2 Devices at Once – Equipped with a dual port design allows two devices to be powered and charged simultaneously, saving you time and eliminating the need for multiple chargers
- Universal Compatibility – With USB A and USB C ports, you can charge your latest and legacy devices effortlessly
- Advanced Technology – Supporting Power Delivery (PD) 3.0, Qualcomm Quick Charge (QC) 4.0+ and other leading protocols ensures the latest devices can benefit from the fast and smart charging capabilities
- Programmable Power Supply – PPS technology provides an optimised experience by adapting the power, charging at safer and more efficient speeds, and extending the device's battery life and health
- Intelligent GaN Semiconductor – Delivers a faster, more energy-efficient, cooler, and safer charging experience, all in a smaller size compared to traditional chargers
- Compact and Portable – Making it easy to pack away, ensuring you have a reliable power source whether you are travelling, in the office or at home
- Safety First – With built-in protection, your device remains safe from overcurrent, overvoltage, short-circuiting or overheating

Cat No	USB Output	Colour	Pack Qty
USBPLGAC30W/U-MP	30W	White	5

**67W USB A + C Fast Charger**

- Powerful USB Charging – Delivering a 67W output, this is an ideal solution for fast charging your mobile phones and tablets
- Power and Charge 2 Devices at Once – Equipped with a dual port design allows two devices to be powered and charged simultaneously, saving you time and eliminating the need for multiple chargers
- Universal Compatibility – With USB A and USB C ports, you can charge your latest and legacy devices effortlessly
- Advanced Technology – Supporting Power Delivery (PD) 3.0, Qualcomm Quick Charge (QC) 4.0+ and other leading protocols ensures the latest devices can benefit from the fast and smart charging capabilities
- Programmable Power Supply – PPS technology provides an optimised experience by adapting the power, charging at safer and more efficient speeds, and extending the device's battery life and health
- Intelligent GaN Semiconductor – Delivers a faster, more energy-efficient, cooler, and safer charging experience, all in a smaller size compared to traditional chargers
- Compact and Portable – Making it easy to pack away, ensuring you have a reliable power source whether you are travelling, in the office or at home
- Safety First – With built-in protection, your device remains safe from overcurrent, overvoltage, short-circuiting or overheating

Cat No	USB Output	Colour	Pack Qty
USBPLGACC67W/U-MP	67W	White	5





OUTDOOR

Weatherproof Double Socket Garden Spike

- Two splashproof and safety shuttered sockets – prevents the insertion of foreign objects
- Fifteen metres of cable – to extend the reach of the socket
- High visibility orange cable – ensures against tripping hazards and cable being cut
- Tapered spike – to fix into the ground
- Carry handle – allows for easy transportation



Cat No.	Cable Length	Rating	IP Rating	Sockets	Carton Qty
IPGS15/2-MP	15m	13A	IP54	2	6



Weatherproof Double Socket Case Reel

- Two safety shuttered sockets – prevents the insertion of foreign objects
- Twenty metres of cable – to extend the reach of the socket
- Robust design – ideal for home, DIY and light commercial use
- Safety thermal cut-out – prevents overheating if reel is overloaded when not fully unreeled
- Handle – allows for easy transportation
- Drum wind handle – making retracting the cable after use easy
- Splashproof socket covers – ideal for use with pressure washers and in damp conditions



Cat No.	Cable Length	Rating	IP Rating	Sockets	Carton Qty
HLP2013/2IP-MP	20m	13A	IP54	2	2



Weatherproof Box

- IP54 Rated – dust and weatherproof
- Multiple cable entry points – five cable outlets with 2 optional M20 glands
- Versatile – suitable for extension leads, up to 4 sockets, fits bulky adaptors, transformers and timers
- Wall-fixing capability – for an 'off the floor' neat and tidy solution



Cat No.	IP Rating	Colour	Carton Qty
WBXG-MP	IP54	Green	4
WBX-MS	IP54	Grey	2



Weatherproof Box Kits

- IP54 rated – dust and weatherproof
- Multiple cable entry points – five cable outlets with 2 optional M20 glands
- Versatile – fits bulky adaptors, transformers and timers
- Wall-fixing capability – for an 'off the floor' neat and tidy solution
- Four safety shuttered sockets – prevents the insertion of foreign objects
- Ten metres of cable – to extend the reach of the socket



Cat No.	Cable Length	Rating	IP Rating	Colour	Sockets	Carton Qty
WBXBFG10B-MP	10m	13A	IP54	4	Black	2



OUTDOOR

Weatherproof Box

- Collapsible Design – for easier storage when not in use
- IP54 Rated – prevents dust and water ingress, making it suitable for outdoor use
- Five Cable Entry Points – ideal for four socket extension leads
- Wall-Fixing Capability – for an 'off the floor' neat and tidy solution
- Versatile – suitable for extension leads, bulky adaptors, transformers and timers
- Simple tool-free locking point – preventing easy access by children and pets
- Multi-purpose – ideal for Christmas decorations, lighting, water features, patio heaters, hot tubs and more
- Supplied with a 4 socket 8m extension lead



Cat No.	Description	Carton Qty
WBCBBFG8B-MP	Collapsible weatherproof box + 4 socket 13A Extension lead – Black	4



Single Socket Garden Extension Lead with Cable Tidy

- Safety shuttered socket – prevents the insertion of foreign objects
- Fifteen metres of cable – to extend the reach of the socket
- High visibility orange cable – ensures against tripping hazards and cable being cut
- Cable tidy – for a neat and tidy solution and easy when transporting



Cat No.	Cable Length	Rating	Sockets	Colour	Carton Qty
CT1513-MP	15m	13A	1	Orange	4



Single Socket Garden Extension

- One socket – allows you to extend the reach of your outlet
- Safety shuttered socket – prevents the insertion of foreign objects
- Ten metres of cable – to extend the reach of the socket
- High visibility orange cable – ensures against tripping hazards and cable being cut
- Trusted quality – manufactured and certified to BS1363-2



Cat No.	Cable Length	Rating	Sockets	Colour	Carton Qty
BOG100-MP	10m	13A	1	Orange	10





OUTDOOR

Cable Tidy

- Neat and tidy – ideal for tidying loose extension leads and cable around the home and garage
- Great storage – stores up to 15m 13 amp (1.25mm²) or 20m of 10 amp (1.00mm²) cable
- Flexible design – suits all lengths of cable
- Strong and sturdy solution – with a convenient carry handle and plug holder



Cat No.	Colour	Carton Qty
CT100-MP	Black	10

Splashproof Plug and Socket Cover

- Splashproof socket cover – ideal for use with pressure washers and in damp conditions
- Protects power connections – prevents accidental plug and socket detachment
- High visibility – ensures against tripping hazards
- Suitable for the garden – ideal for garden and household power tools



Cat No.	Colour	Carton Qty
SPTO-MP	Orange	10

Weatherproof Extension Lead with Cable Tidy

- Safety shuttered socket – prevents the insertion of foreign objects
- Splashproof socket cover – ideal for use with pressure washers and in damp conditions
- Fifteen metres of cable – to extend the reach of the socket
- High visibility orange cable – ensures against tripping hazards and cable being cut
- Cable tidy – for a neat and tidy solution and easy when transporting



Cat No.	Cable Length	Rating	IP Rating	Socket	Colour	Carton Qty
CT1513P/IPS-MP	15m	13A	IP54	1	Orange	4



OUTDOOR

RCD Safety Plug-through Adaptor

- Plug-through design – connect one device to the RCD adaptor
- Active (non-latching) type – when power is cut to the device, the RCD will trip and have to be reset
- RCD protection – against the risk of fatal electric shocks
- 40ms trip speed – to provide fast protection
- Double pole contact break – for additional safety



Cat No.	Description	Colour	Pack Qty
ARCDKG-MP	Non-latching RCD Safety Adaptor	Grey	5



RCD Safety Plug

- Rewireable – ideal for lawnmowers, hedge trimmers, or any power tool
- Active (non-latching) type – when power is cut to the device, the RCD will trip and have to be reset
- RCD protection – against the risk of fatal electric shocks
- 40ms trip speed – to provide fast protection
- Double pole contact break – for additional safety



Cat No.	Description	Colour	Pack Qty
PRCDKB-MP	Non-latching RCD Safety Plug	Black	5



Inline Safety RCD

- Easy to wire – fit to an existing cable reel for instant protection
- Active (non-latching) type – when power is cut to the device, the RCD will trip and have to be reset
- RCD protection – against the risk of fatal electric shocks
- 40ms trip speed – to provide fast protection
- Double pole contact break – for additional safety



Cat No.	Description	Colour	Pack Qty
ILRCDNG-MP	Non-latching Inline RCD	Black	5



Heavy Duty Single Socket Extension Lead

- One socket – allows you to extend the reach of your outlet
- Five or ten metres of cable – to extend the reach of the socket
- Socket safety shutter – prevents the insertion of foreign objects
- Heavy duty construction – built to last
- Trusted quality – manufactured and certified to BS1363
- Finished in black or orange



Cat No.	Cable Length	Rating	Sockets	Colour	Carton Qty
EXS13110B-01	10m	13A	1	Black	10
EXS13110O-01	10m	13A	1	Orange	10
EXS1315B-01	5m	13A	1	Black	10
EXS1315O-01	5m	13A	1	Orange	10



Heavy Duty Double Socket Extension lead

- Two sockets – allows you to connect two items safely into one outlet
- Four metres of cable – to extend the reach of the socket
- Socket safety shutter – prevents the insertion of foreign objects
- Heavy duty construction – built to last
- Trusted quality – manufactured and certified to BS1363
- Finished in black or white



Cat No.	Cable Length	Rating	Sockets	Colour	Carton Qty
EXS1324B-01	4m	13A	2	Black	10
EXS1324W-01	4m	13A	2	White	10



Heavy Duty Four Socket Extension Lead

- Four sockets – allows you to connect four items safely into one outlet
- Two or four metres of cable – to extend the reach of the socket
- Socket safety shutter – prevents the insertion of foreign objects
- Heavy duty construction – built to last
- Replaceable fuse – for extra safety
- Trusted quality – manufactured and certified to BS1363
- Finished in black, white or orange



Cat No.	Cable Length	Rating	Sockets	Colour	Carton Qty
EXS1342B-01	2m	13A	4	Black	10
EXS1342O-01	2m	13A	4	Orange	10




Heavy Duty Plug

- Solid brass sleeved pins – prevents contact when the plug pins are live
- Rewireable – for a custom solution
- Heavy duty construction – built to last
- Trusted quality – manufactured and certified to BS1363
- 13A rated – suitable up to 3120W



Cat No.	Fused	Colour	Pack Qty
HDPT13B-01	13A	Black	10
HDPT13O-01	13A	Orange	10
HDPT13W-01	13A	White	10



Heavy Duty Inline Connector

- Rewireable – for a custom solution
- Heavy duty construction – built to last
- 2 pin – reversible connection block
- 3 pin – non-reversible connection block
- Trusted quality – manufactured to BS5733



Cat No.	Type	Pin	Rating	Colour	Pack Qty	Carton Qty
NC102B	Connector	2	10A	Black	10	100
NC102O	Connector	2	10A	Orange	10	100
NC103B	Connector	3	10A	Black	10	100
NC103W	Connector	3	10A	White	10	100



Trailing Single Socket

- One socket – allows you to extend the reach of your outlet
- Rewireable – for a custom solution
- Socket safety shutter – prevents the insertion of foreign objects
- Heavy duty construction – built to last
- Trusted quality – manufactured and certified to BS1363
- Finished in black, white or orange



Cat No.	Rating	Sockets	Colour	Pack Qty
ELS13B-01	13A	1	Black	10
ELS13O-01	13A	1	Orange	10
ELS13W-01	13A	1	White	10

**WORK X****Trailing Double Socket**

- Two sockets – allows you to connect two items safely into one outlet
- Rewireable – for a custom solution
- Socket safety shutter – prevents the insertion of foreign objects
- Heavy duty construction – built to last
- Trusted quality – manufactured and certified to BS1363
- Finished in black, white or orange



Cat No.	Rating	Sockets	Colour	Carton Qty
ELS132B-01	13A	2	Black	50
ELS132O-01	13A	2	Orange	50
ELS132W-01	13A	2	White	50

**Trailing Socket Four Socket**

- Four sockets – allows you to connect four items safely into one outlet
- Rewireable – for a custom solution
- Socket safety shutter – prevents the insertion of foreign objects
- Heavy duty construction – built to last
- Replaceable fuse – for extra safety
- Trusted quality – manufactured and certified to BS1363
- Finished in black, white or orange



Cat No.	Rating	Sockets	Colour	Carton Qty
ELS134B-01	13A	4	Black	25
ELS134O-01	13A	4	Orange	25
ELS134W-01	13A	4	White	25

**Small Cassette Reel**

- Two or four sockets – allows you to connect multiple items safely into one outlet
- Four or five metres of cable – to extend the reach of the socket
- Socket safety shutters – prevents the insertion of foreign objects
- Robust design – ideal for home, DIY and light commercial use
- Safety thermal cut-out – prevents overheating if reel is overloaded when not fully unreeled
- Rear grip – allows for easy transportation
- Drum wind handle – making retracting the cable after use easy
- Trusted quality – manufactured and certified to BS 61242



Cat No.	Cable Length	Rating	Sockets	Colour	Carton Qty
SCT0510/4BL-MP	5m	10A	4	Blue	5

**WORK X****Medium Cassette Reel**

- Four sockets – allows you to connect multiple items safely into one outlet
- Eight or ten metres of cable – to extend the reach of the socket
- Socket safety shutters – prevents the insertion of foreign objects
- Robust design – ideal for home, DIY and light commercial use
- Safety thermal cut-out – prevents overheating if reel is overloaded when not fully unreeled
- Rear grip – allows for easy transportation
- Drum wind handle – making retracting the cable after use easy
- Trusted quality – manufactured and certified to BS 61242



Cat No.	Cable Length	Rating	Sockets	Colour	Carton Qty
MCT0813/4BL-MP	8m	13A	4	Blue	10
MCT1010/4BL-MP	10m	10A	4	Blue	10

**Large Cassette Reel**

- Four sockets – allows you to connect four items safely into one outlet
- 12 or 15 metres of cable – to extend the reach of the socket
- Socket safety shutters – prevents the insertion of foreign objects
- Robust design – ideal for home, DIY and light commercial use
- Safety thermal cut-out – prevents overheating if reel is overloaded when not fully unreeled
- Rear grip – allows for easy transportation
- Drum wind handle – making retracting the cable after use easy
- Trusted quality – manufactured and certified to BS 61242
- 10A rated – suitable up to 2400W, 240V AC
- 13A rated – suitable up to 3120W, 240V AC



Cat No.	Cable Length	Rating	Sockets	Colour	Carton Qty
LCT1510/4BL-MP	15m	10A	4	Blue	10

**Small Case Reel**

- Four sockets – allows you to connect four items safely into one outlet
- Socket safety Shutters – prevents the insertion of foreign objects
- Robust design – ideal for home, DIY and light commercial use
- 15 metres of cable – to extend the reach of the socket
- Safety thermal cut-out – prevents overheating if reel is overloaded when not fully unreeled
- Carry handle – allows for easy transportation
- Drum wind handle – making retracting the cable after use easy
- Trusted quality – manufactured and certified to BS 61242
- 13A rated – suitable up to 3120W, 240V AC



Cat No.	Cable Length	Rating	Sockets	Colour	Carton Qty
HST1513/4BL-MP	15m	13A	4	Blue	3





WORK X

Large Case Reel

- Four sockets – allows you to connect four items safely into one outlet
- Socket safety shutters – prevents the insertion of foreign objects
- Robust design – ideal for home, DIY and light commercial use
- 20 metres of cable – to extend the reach of the socket
- Safety thermal cut-out – prevents overheating if reel is overloaded when not fully unreeled
- Carry handle – allows for easy transportation
- Drum wind handle – making retracting the cable after use easy
- Trusted quality – manufactured and certified to BS 61242
- RCD plug option – for added protection against fatal electric shocks
- 13A rated – suitable up to 3120W, 240V AC



Cat No.	Cable Length	Rating	Sockets	Colour	Carton Qty
HBT2013/4BL-MP	20m	13A	4	Blue	6

*Includes RCD plug



Medium Open Reel

- Four sockets – allows you to connect four items safely into one outlet
- Socket safety shutters – prevents the insertion of foreign objects
- Robust design – ideal for home, DIY and light commercial use
- 25 or 30 metres of cable – to extend the reach of the socket
- Safety thermal cut-out – prevents overheating if reel is overloaded when not fully unreeled
- Carry handle – allows for easy transportation
- Drum wind handle – making retracting the cable after use easy
- Trusted quality – manufactured and certified to BS 61242
- RCD plug option – for added protection against fatal electric shocks
- 13A rated – suitable up to 3120W, 240V AC



Cat No.	Cable Length	Rating	Sockets	Colour	Carton Qty
LDCC2513/4BL-MP	25m	13A	4	Blue	1
LDCC2513/4BLRCD-MP *	25m	13A	4	Blue	1
LDCC3013/4BL-MP	30m	13A	4	Blue	1

* Includes RCD plug



Large Open Reel

- Four sockets – allows you to connect four items safely into one outlet
- Socket safety shutters – prevents the insertion of foreign objects
- Robust design – ideal for home, DIY and light commercial use
- 40 or 50 metres of cable – to extend the reach of the socket
- Safety thermal cut-out – prevents overheating if reel is overloaded when not fully unreeled
- Carry handle – allows for easy transportation
- Drum wind handle – making retracting the cable after use easy
- Trusted quality – manufactured and certified to BS 61242
- 13A rated – suitable up to 3120W, 240V AC



Cat No.	Cable Length	Rating	Sockets	Colour	Carton Qty
HDCC4013/4BL-MP	40m	13A	4	Blue	1
HDCC5013/4BL-MP	50m	13A	4	Blue	1



HOME

Premium Door Chimes

- 6 melodies – a choice of 4 x 'Ding Dong' and 2 x 'Westminster'
- 100m range – suitable for large homes
- One in a million random code connection – no interference with your neighbour
- Battery powered button – supplied with CR2032 battery
- Adjustable volume – change the volume depending on your needs
- IP44 push button – suitable for outdoor installation
- LED indicator – visual indication of door chime activation
- Battery powered – chime can be placed anywhere around the home (requires 3 x AA batteries)
- Plug-in – ensure you always have power to your chime
- Plug-through – ensure you always have power to your chime without losing socket space



Cat No.	Description	Colour	Melodies	Sound Level	Range	LED Indicator	Pack Qty
BDCPO100	Portable Door Chime	Two Tone	6	85db	100m	Bell Push/Receiver	5
BDCPL100	Plug-in Door Chime	Two Tone	6	85db	100m	Bell Push/Receiver	5
BDCPT100	Plug-through Door Chime	Two Tone	6	85db	100m	Bell Push/Receiver	5





TRAVEL

Travel Adaptor UK to Europe

- Ideal when travelling in Europe – convert UK plugs for use with European sockets
- Small and compact – easy to fit in your bag or suitcase
- Trusted quality – manufactured and certified to BS 8546
- TAEUR/2 – 2 pack



Cat No.	Description	Pack	Pack Qty
TAEUR-MP	UK to Europe	1	5



Travel Adaptor UK to Europe – 2 Socket

- Ideal when travelling in Europe – convert UK plugs for use with European sockets
- Small and compact – easy to fit in your bag or suitcase
- Trusted quality – manufactured and certified to BS 8546



Cat No.	Description	Pack	Qty
TAEUR2-MP	UK to Europe	1	5



Travel Extension Lead with USB Charging UK to Europe

- Ideal when Travelling in Europe – convert UK plugs for use with European Sockets
- Integrated Cable Tidy and Velcro Strap – keeps the cable neat and tidy when not in use
- 0.45m of Cable – ideal for floor or hotel desk positioning when travelling for personal or business travel
- Ideal for individual or business travel
- Two USB Ports with Market-Leading 20W Output – Type A and Type C with Power Delivery (PD) 3.0 and Qualcomm Quick Charge (QC) 3.0 for super-fast charging
- USB Smart Charging – intelligently detects the power requirement to optimally charge then switches to standby to prevent long-term damage to your device



Cat No.	Description	Pack	Qty
TAEUR2UAC20-MP	UK to Europe	1	5



TRAVEL

Travel Adaptor UK to US

- Ideal when travelling in Asia, Australia and the US – convert UK plugs for use with US sockets
- Small and compact – easy to fit in your bag or suitcase
- Trusted quality – manufactured and certified to BS 8546



Cat No.	Description	Pack	Qty
TAUSA-MP	UK to US/Asia	1	5




Travel Extension Lead with USB Charging UK to USA

- Ideal when Travelling in the US – convert UK plugs for use with US Sockets
- Integrated Cable Tidy and Velcro Strap – keeps the cable neat and tidy when not in use
- 0.45m of Cable – ideal for floor or hotel desk positioning when travelling for personal or business travel
- Ideal for individual or business travel
- Two USB Ports with Market-Leading 20W Output – Type A and Type C with Power Delivery (PD) 3.0 and Qualcomm Quick Charge (QC) 3.0 for super-fast charging
- USB Smart Charging – intelligently detects the power requirement to optimally charge then switches to standby to prevent long-term damage to your device



Cat No.	Description	Pack	Qty
TAUSA2UAC20-MP	UK to US/Asia	1	5





TRAVEL

European Plug USB Charger

- Ideal when travelling in Europe – power and charge your USB devices
- Three USB ports – (3.4A shared) for charging your portable devices
- Trusted quality – manufactured and certified to BS 8546 and EN62368



Cat No.	Description	Pack Qty
TAUSBEUPLG-MP	Europe USB Charger	5

USB Travel Adaptor UK To Europe

- Ideal when travelling in Europe – convert UK plugs for use with European Sockets
- Three USB ports – (3.4A shared) for charging your portable devices
- Trusted quality – manufactured and certified to BS 8546 and EN62368



Cat No.	Description	Colour	Pack Qty
TAUSBEUR2-MP	UK to Europe + USB	White	5



TIMER

Daily Mechanical Segment Timer

- 24 hour mechanical timer – with 15 minute segments
- Simple to use – simply press the segments when you want your device to turn on
- Ideal for indoor power applications – great for slow cookers, lighting, fish tanks and more
- Manual override function – override the timer to power the connected device
- Trusted quality – manufactured to EN60730-2-7
- TMS24/3 – 3 pack



Cat No.	Description	Pack	Pack Qty
TMS24-MP	24hr Mechanical Timer – Small	1	5

**Programmable Electronic Timer**

- Great for security – random function to mimic home activity
- 7 day timer – with 16 selectable options and 10 programmes
- Easy to use – with the LCD display and button control
- Manual override function – override the timer to power the connected device
- Back up battery – retains the memory of the programs when there is a power outage
- Trusted quality – manufactured to EN60730-2-7



Cat No.	Description	Pack Qty
TES7-MP	7 Day Electronic Timer – Small	5

**Mechanical Daily Immersion Timer**

- General purpose timer to offer complete control for hard-wired applications – ideal for immersion heaters, towel rails and lighting
- Easy to use – integrated clock face to easily set timings and LED power indicator
- Wall-fixing capability – for a neat and tidy install
- Manual override function – override the timer to power the connected device
- 24 hour mechanical timer – with 15 minute segments
- Trusted quality – manufactured to EN60730-2-7



Cat No.	Description	Pack Qty
TMIIHMEC-MP	Mechanical 24hr Immersion Heater Timer	5





**POWER
AT WORK**

Extension Reel Work Light

Providing both light and power for heavy duty applications with a 5W 500lm LED light. The 4 power sockets with switch gives you power control where you are working, fitted with 5m of cable you will never have insufficient light or power again.

- Four sockets – allows you to connect four items safely into one outlet
- Socket Safety Shutters – prevents the insertion of foreign objects
- Five metres of cable – to extend the reach of the socket
- Integrated LED light – 500lm at 5W with an independent power switch
- Ergonomic handle grip – a two-tone superior handle grip, for comfort and longevity
- Fold out stand and built-in cable storage – for neat and tidy solution when in and not in use
- Localised power switch – control the power where you are working

5W 500lm
4 SOCKETS
5m
13 AMPS



Cat No.	Cable Length	Lumens	Sockets	Carton Qty
WLU05134SL-PX	5m	500lm	4	5

Cassette Reel

- Four Sockets – allows you to connect four items safely into one outlet
- Socket Safety Shutters – prevents the insertion of foreign objects
- Ten Metres of Cable – to extend the reach of the socket
- Ergonomic Handle and Rear Grip – for comfort and ease of use
- Pull-Out Drum Handle – quickly wind in the cable at the end of each use
- Localised Power Switch – control the power where you are working

4 SOCKETS
10m
13 AMPS

Cat No.	Description	Rating	Cable Length	Socket	Carton Qty
CMU10134SL-PX	Cassette Reel	13A	10m	4	5



Case Reel

- Four Sockets – allows you to connect four items safely into one outlet
- Socket Safety Shutters – prevents the insertion of foreign objects
- 15 Metres of Cable – to extend the reach of the socket
- Ergonomic Handle Grip – for comfort and ease of use
- Pull-Out Drum Handle – quickly wind in the cable at the end of each use
- Localised Power Switch – control the power where you are working

4 SOCKETS
15m
13 AMPS

Cat No.	Description	Rating	Cable Length	Socket	Carton Qty
HMU15134SL-PX	Case Reel	13A	15m	4	3



**POWER
AT WORK**

Open Reels

- Four Sockets – allows you to connect four items safely into one outlet
- Socket Safety Shutters – prevents the insertion of foreign objects
- 25 or 50 Metres of Cable – to extend the reach of the socket
- Ergonomic Handle Grip – a two-tone superior handle grip, for comfort and longevity
- Pull-Out Drum Handle – quickly wind in the cable at the end of each use
- Localised Power Switch – control the power where you are working
- Integrated Cable Guide – reduces tangles and speeds up winding in

4 SOCKETS
25m
50m
13 AMPS



Cat No.	Description	Rating	Cable Length	Socket	Carton Qty
OMU25134SL-PX	Medium Open Reel	13A	25m	4	1
OLU50134SL-PX	Large Open Reel	13A	50m	4	1

Open Reel with USB

- Four Sockets – allows you to connect four items safely into one outlet
- Socket Safety Shutters – prevents the insertion of foreign objects
- 25 Metres of Cable – to extend the reach of the socket
- Two USB Ports (2.1A Shared) – for charging your portable devices whilst working, keeping power tools connected
- Ergonomic Handle Grip – a two-tone superior handle grip, for comfort and longevity
- Pull-Out Drum Handle – quickly wind in the cable at the end of each use
- Localised Power Switch – control the power where you are working
- Integrated Cable Guide – reduces tangles and speeds up winding in

4 SOCKETS
25m
2 USB SOCKETS
13 AMPS

Cat No.	Description	Rating	Cable Length	USB Output	Socket	Carton Qty
OMU25132USL-PX	Medium Open Reel with USB	13A	25m	2.1A	2	1

Metal Open Reel

- Four Sockets – allows you to connect four items safely into one outlet
- Socket Safety Shutters – prevents the insertion of foreign objects
- 40 Metres of Cable – to extend the reach of the socket
- Heavy Duty Metal Drum – provides additional security for heavy duty tasks
- Ergonomic Handle Grip – a two-tone superior handle grip, for comfort and longevity
- Pull-Out Drum Handle – quickly wind in the cable at the end of each use
- Localised Power Switch – control the power where you are working
- Integrated Cable Guide – reduces tangles and speeds up winding in

4 SOCKETS
40m
13 AMPS

Cat No.	Description	Rating	Cable Length	Socket	Carton Qty
OTLU40134SL-PX	Large Metal Open Reel	13A	40m	4	1





SITE 110V

Cable Reel

- Two 16A 110V IP44 Sockets – ideal when being used on sites with temporary power
- 25 or 50 Metres of Cable – to extend the reach of the socket
- Robust Design – ideal for Site, DIY and light commercial use
- Safety Thermal Cut-Out – prevents overheating if reel is overloaded when not fully unreeled
- Carry Handle – allows for easy transportation
- Drum Wind Handle – making retracting the cable after use easy
- Power Indicator – shows that your device is connected to the mains
- Highly Visible Yellow Cable – ideal for site use



Cat No.	Rating	Sockets	Cable Length	Carton Qty
LVCT2516/2-MP	16A	2	25m	1
LVCT5016/2-MP	16A	2	50m	1

**Metal Cable Reel**

- Two 16A 110V IP44 Sockets – ideal when being used on sites with temporary power
- 30 Metres of Cable – to extend the reach of the socket
- Heavy Duty Metal Drum – provides additional security for heavy duty tasks
- Robust Design – ideal for Site, DIY and light commercial use
- Safety Thermal Cut-Out – prevents overheating if reel is overloaded when not fully unreeled
- Ergonomic Handle Grip – a two-tone superior handle grip, for comfort and longevity
- Drum Wind Handle – making retracting the cable after use easy
- Power Indicator – shows that your device is connected to the mains
- Integrated Cable Guide – reduces tangles and speeds up winding in
- Highly Visible Yellow Cable – ideal for site use



Cat No.	Description	Rating	Sockets	Cable Length	Carton Qty
OTMU30162LV-PX	Metal	16A	2	30m	1

**Inline Extension Lead**

- One 16A 110V IP44 Socket – ideal when being used on sites with temporary power
- 15 Metres of Cable – to extend the reach of the socket
- Carry Tidy – allows for easy transportation
- Highly Visible Yellow Cable – ideal for site use



Cat No.	Rating	Sockets	Cable Length	Carton Qty
LVL15-MS	16A	1	15m	4



SITE 110V

Portable Transformer

- One 16A 110V IP44 Socket – ideal when being used on sites with temporary power
- 1.5 Metres of Cable – to extend the reach of the socket
- Carry Handle – allows for easy transportation
- Highly Visible Yellow Cable – ideal for site use
- Aluminium Body – built to last



Cat No.	Rating	Sockets	Cable Length	Carton Qty
LV3000VAT-MP	3.3kVA	2	1.5m	1

Portable Work Light

- 3000mm H07RN-F 1.5mm² 3 core rubber cable on pre-wired option
- 110V 16A plug to EN 60309
- Polycarbonate body and diffuser
- 110V input voltage

LUCECO
LIGHTING

Cat No.	Lumens	Wattage	Carton Qty
LSPW181V-01	1800	22W	8





AURALINE

Auraline SmartEnergy Glass Panel Heater

- Smart wi-fi connectivity with in-built energy usage and cost monitoring
- With the masterplug smartenergy app, track your energy costs in real time
- Adjustable temperature option and two power modes
- Safe to use around children and pets
- Elegant, silent and functional smart heater in a white & grey finish



Cat No	Colour	Max Wattage	Frequency	Housing Material
FANGP200GUK	Anthracite Grey	2000W	50/60Hz	Glass Front/Iron Back
FANGP200WUK	Arctic White	2000W	50/60Hz	Glass Front/Iron Back



BREEZE

Breeze SmartEnergy Bladeless Heater & Fan

- Smart wi-fi connectivity with in-built energy usage and cost monitoring
- With the masterplug smartenergy app, track your energy costs in real time
- Adjustable temperature option and two power modes
- Safe to use around children and pets
- A portable design with a 60° rotation function



Cat No	Heating Distribution	Max Wattage	Frequency	Housing Material
FANPTC150WUK	Direct Fan	1500W	50Hz	Acrylonitrile Butadiene Styrene



1.5W USB Rechargeable Mini Tilt Torch

- Single source light source prevents multi shadowing – ideal for professionals
- USB Rechargeable Tilt Torch
- 2 working light modes
- Durable hard wearing housing
- Multi fixing – 180° tilting magnetic base
- Supplied with USB charging cable

Cat No.	Lumens	Wattage	Battery Life	Battery Charge Time
LILT15T65	150	1.5W	2 hours (On Max)	Up to 2 hours charging



3W USB Rechargeable Swivel Torch with Power Bank

- Single source light source prevents multi shadowing – ideal for professionals
- Inbuilt 2000 mAh USB power bank for charging devices
- 2 working light modes
- Durable hard wearing housing
- Multi fixing – 360° folding hook
- 360° rotate and tilt magnetic base
- Supplied with USB charging cable

Cat No.	Lumens	Wattage	Battery Life	Battery Charge Time
LILT30R65	300	3W	3 hours (On Max)	Up to 3 hours charging



5W USB Rechargeable Tilt Torch with Power Bank

- Multi fixing – 360 degree folding hook and tilting magnetic base
- Red flashing beacon
- Durable hard wearing housing
- Inbuilt 2000mAh USB powerbank for charging devices
- Supplied with USB charging cable
- 360° rotate and tilt magnetic base
- Supplied with USB charging cable

Cat No.	Lumens	Wattage	Battery Life	Battery Charge Time
LILT45T65	450	5W	2 hours (On Max)	Up to 3.5 hours charging



3.5W Slim Foldable Torch with UV & Power Bank

- 4 light output modes including UV light
- 180° rotating for easy storage
- Retractable metal hanging hook
- USB Type-C charging cable supplied
- IK07 impact rating
- 2.5hrs Battery life on Max output
- 500lm, 200lm and 150lm light output modes

Cat No.	Lumens	Wattage	Battery Life	Battery Charge Time
LILT50UV65	500	3.5W	2.5-13 hours	2.5 hours



LED Rechargeable Inspection Torch with Flexibile Hose

- High quality LED Chip – 6500K
- Durable 2m drop resistance body: IK rating IK08
- 300mm Flexible hose design provides 360° rotation and easy access for narrow and difficult to reach spaces
- Strong magnetic base for handsfree attachment & 360° foldaway hanging hook
- High quality battery Li-ion 2500mAh

Cat No.	Lumens	Wattage	Battery Life	Battery Charge Time
LILFLEX100G65	1000	10W	1.5 hours	3-5 hours



5W LED Rechargeable Mini Work Light

- Clamp with magnetic base rotatable
- 3 Working light modes including red warning light
- IP44 waterproof for the work lights
- Durable hard wearing housing
- Supplied with USB C charging cable

Cat No.	Lumens	Wattage	Battery Life	Battery Charge Time
LILC50G65	500	5W	Approx. 1 hour	2-3 hours



LED Rechargeable Multi-Focus Hand Torch

- High quality LED Chip – 6500K
- Durable die-cast aluminium body
- Tactical grip with helpful pocket clip
- Adjustable head for short and long distance focus beam control
- 3 light modes: 100%, 50%, 25%
- High quality 18650 Li-ion battery for long life
- Built-in USB-C charging port
- Circuit Protection prevents battery from over-charging or discharging
- Fast 1A USB-C charging: USB-C charging cable included



Cat No.	Lumens	Wattage	Battery Charge Time
LILHT40B65	400	4W	100%: 1hr 40mins 50%: 3hrs 20 mins 25%: 6hrs
LILHT60B65	600	6W	100%: 1hr 30mins 50%: 3hrs 25%: 5hrs 30mins
LILHT100B65	1000	9W	100%: 1hr 50%: 2hrs 25%: 3hrs 30mins

5W USB Flexible Torch with Motion Sensor

- Switch or PIR motion sensing on/off function for hands free operation
- Wide light beam angle
- Type-C USB rechargeable – 1200mA battery
- Durable & Lightweight
- Working time: 3-6 hours
- Charging time: 3.5 hours

Cat No.	Lumens	Wattage	Battery Life	Battery Charge Time
LILHF35P65	350+150lm	5W	3-6 hours	3.5 hours



3W USB Inspection Head Torch with Motion Sensor

- USB rechargeable
- Durable & lightweight
- Switch or PIR motion sensing on/off function for hands free operation
- Adjustable up to 60° for multiple applications
- 5 lighting settings – 100%, 50%, Flash, Red Light, Red Flash

Cat No.	Lumens	Wattage	Battery Life	Battery Charge Time
LILH15P65	150	3W	3-20 hours	Up to 3 hours charging



7.5W USB Rechargeable Compact Magnetic Work Light

- Compact design with stand/carry handle, hook and magnetic function
- USB charging port and charging indicator
- High and low power modes
- 2 mode Weatherproof power switch
- Toughened IK07 ABS constructed body with rubber trim for added protection

Cat No.	Lumens	Wattage	Battery Life	Battery Charge Time
LWR7G65	750	7.5W	3/10 hours	3 hours



10W USB Folding Clamp Rechargeable Work Light with Power Bank

- Stand and carry handle
- Multiple stand positions
- Toughened IK07 ABS constructed body
- 1m USB charge cable
- 4400mAh inbuilt power bank

Cat No.	Lumens	Wattage	Battery Life	Battery Charge Time
LILC10G65	1000	10W	2.5 hours on max	6 hours



10W USB Folding Magnetic Rechargeable Work Light with Power Bank

- Portable work light with magnetic function, stand and carry handle
- Robust polycarbonate construction for increased durability
- Supplied with charging adaptor and USB cable
- Variable light output and flashing mode
- 180° Vertical Adjustment

Cat No.	Lumens	Wattage	Battery Life	Battery Charge Time
LILM13G65	1300	10W	1.5 hours on max	5-6 hours



5W LED Rechargeable Multi-function Tilt Tripod Torch with Power Bank

- 3 lighting modes including Red Warning
- Fully adjustable handle with fold out tripod legs
- USB Type-C charging cable supplied
- Power bank function
- IP44 rated for external use
- 3 lighting modes: 300lm / 150lm / Red
- Working time: 2 hours on max output
- Battery: 3.7V/2400mAh 18650

Cat No.	Lumens	Wattage	Battery Life	Battery Charge Time
LILTP33S65	330	5W	2 hours	4 hours



10W USB-C Rechargeable High Output Inspection Torch

- Multi fixing – 360 degree folding hook and tilting magnetic base
- 2 working light modes and red flashing beacon
- Durable hard wearing housing
- Supplied with USB-C cable

Cat No.	Lumens	Wattage	Battery Life	Battery Charge Time
LILW100U65UC	1000	10W	2.5 hours on max	Up to 5 hours charging



8W LED High Power Spot Light with Fold-out Stand

- Focused long distance spot or wide area light modes
- Durable ABS and Rubber material
- Fold out stand for focused floor mounting
- High Capacity Battery: 3.7V / 2400mAh
- Compact folding for easy storage
- Hidden foldaway carry handle
- USB Type-C Cable 60cm included
- Can be mounted on tripod

Cat No.	Lumens	Wattage	Battery Life	Battery Charge Time
LILSP60G65	600	8W	1-8 hours	3-4 hours



6W LED Magnetic Clamp Fan Light With Power Bank

- Durable hard wearing housing
- Inbuilt 4000mAh power bank
- Big clamp with strong magnet base
- Mode of fan: Slow / Middle / Fast / Nature / OFF
- Run time: 10hrs / 5hrs / 2.5hrs / 4hrs
- Mode of light: Low bright / High bright / OFF
- Run time: 10hrs / 5hrs
- Supplied with USB C charging cable
- Light head 360° vertical and 360° horizontal rotatable

Cat No.	Lumens	Wattage	Battery Life	Battery Charge Time
LILFL25G65	250	6W	Fan 2.5 hours / Light 5 hours	5-6 hours



25W LED Twin Panel Folding Work Light with Magnetic Clamp and Power Bank

- Inbuilt USB power bank output 5V 1A max
- Fully rotating and tilting head
- Strong magnets base and clamp to attach to everything
- High Capacity Battery: 3.7V / 6000mAh
- 4 lighting modes up to 2500lm

Cat No.	Lumens	Wattage	Battery Life	Battery Charge Time
LILC250G65	2500	25W	50 min	8-9 hours



50W LED Rechargeable 360° Open Area Tripanel Work Light

- 2 side panels foldable and rotatable
- Hidden handle extendable
- Type-C charging socket
- Can be mounted on the tripod
- 3 lighting modes: Low 1200lm 4hrs, Mid 2000lm 1.5hrs & High 4000lm 1hr
- Battery: 7.4V / 4400mAh, 18650

Cat No.	Lumens	Wattage	Battery Life	Battery Charge Time
LILA400S65	4000	50W	1-4 hours	8 hours



20W LED Rechargeable 360° Open Area Light Tube Work Light

- Telescopic light tube - 360° light output
- Foldaway hanging hook and legs for compact storage
- USB Type-C charging cable supplied
- IP44 rated
- 3 lighting modes: Low 300lm 7hrs, Mid 650lm 3.5hrs & High 1500lm 1hr 40mins
- Battery: 3.7V / 6000 mAh, 18650

Cat No.	Lumens	Wattage	Battery Life	Battery Charge Time
LILA150S65	1500	20W	1.5-7 hours	8 hours



20W LED Rechargeable Telescopic Tripod Work Light

- Fully collapsible telescopic tripod - compact storage
- Quick setup folding design - easy to carry
- Type-C charging socket
- 3 lighting modes: Low 520lm 3hr 40min, Mid 1000lm 1hr 50mins, High 2000lm 1hr
- Size of folded: 950mm / Size of expanded: 1.6m
- Battery: 3.7V / 4000mAh, 18650



Cat No.	Lumens	Wattage	Battery Life	Battery Charge Time
LILTP200S65	2000	20W	1-3.5 hours	8 hours

Castra Worklight

- Portable worklight with a sturdy steel stand
- IP65 rated for outdoor or indoor use
- Provides 2200 lumens of bright light with a 5000K cool white colour temperature
- Features weatherproof switch
- Includes: 2m of H05RN-F rubber cable and fitted with a 13A UK plug
- The work light features a corrosion-resistant die-cast aluminium housing
- Tempered frosted glass for high strength and low glare



Cat No.	Lumens	Wattage
LSW20G250	2200	20W
LSW30G250	3300	30W
LSW40G250	5500	50W

66W Herculous Open Area Work Light with 13A Power Socket

- 2 working light modes
- USB-A and USB-C socket entry
- UK Socket input for on-site power extension
- Storable 3m HO7RN-F 3G 1.5mm cable with UK plug
- Easy grip carry handle and hanging hook

Cat No.	Lumens	Wattage	Lifespan
LWHOA70G65UK	7150	66W	20000 hours



IP65 Rating
66W
100-240 Volt
197° Beam Angle
6500K Cool White

30W Foldable Compact Work Light with 13A Power Socket

- LED work light with foldable stand and cable storage
- IP54 with UK socket
- Material: aluminium body & plastic frame
- Beam angle: 110°
- Separate On/Off socket and light switch
- With 1.5m H05RN-F 3G1.5mm² cable and plug

Cat No.	Lumens	Wattage	Lifespan
EFLDS30B50UK	2400	30	25000 hours



IP54 Rating
30W LED
110° Beam Angle
5000K Cool White

Castra Tripod Worklight

- Portable tripod worklight with height adjustable steel stand
- Twin worklights allow independent aiming and switching
- IP65 rated for outdoor or indoor use
- Over 90% energy saving over halogen
- Individual weatherproof power switches on each for independent switching
- Sturdy steel stand, with adjustable height and inbuilt cable storage
- 3m of H05RN-F rubber cable, fitted with 10A UK plug

Cat No.	Lumens	Wattage
LSWT230G350	6600	60W
LSWT250G350	11000	100W



IP65 Rating
100W MAX
5000K Cool White



F-Type MK2 4w/6w 750lm power change & 4 colour CCT 2700k 3000k 4000k 6000k dimmable IP65 white - regressed

- Power Selectable 6W/4W & Colour Selectable 2700K/3000K/4000K/6000K
- Choose the preferred colour temperature to suit your space
- Trade rated toolless SpeedFit connector
- QuickView Cable Window for ease of inspection
- IP65 – ideal for kitchen and bathroom locations
- Supplied with removable Matt White slim bezel
- Available in Flat, Regressed and Adjustable in Polished Chrome, Brushed Steel & Matt Black bezel finish



COLOURED BEZELS AVAILABLE



Cat No.	Bezel Type	Wattage	Colour Change Temp	Luminaire Lumen	Luminaire lm/W	LED Chip lm/W+
FTF6WCCT	Flat	4W/6W	2700K, 3000K, 4000K, 6000K	465 / 710lm (2700K) 470 / 725lm (3000K) 485 / 750lm (4000K) 480 / 745lm (6000K)	116 / 118lm (2700K) 118 / 121lm (3000K) 121 / 125lm (4000K) 120 / 124lm (6000K)	>160
FTR6WCCT	Regressed					

Eco Indoor Bulkhead

- IP54 rated-ideal for bathrooms, utility and decorative installations
- Easy quick installation – wall or ceiling mounted
- Suitable for most residential and commercial applications including bathrooms / toilets, hallways, corridors, and functional utility
- Interchangeable twist on and off white and polished chrome bezels for classic or decorative finishes
- Push fit quick install terminal block



Cat No.	Lumens	Wattage	Lm/CW	Colour Temp	Diameter
EBH22S40	1300	14W	92	4000K	220mm
EBH28S40	1650	17W	97	4000K	280mm
Colour Change					
EBH22SCC	1300-1500-1400	14W	92	3000-4000-6500K	220mm



Andes Bulkhead

- Surface mounted polycarbonate bulkhead with wattage change feature easily selected on site
- Selectable CCT of 3000K and 4000K to suit application
- Rear and side cable entry points to ensure easy access for wiring
- High efficient LEDs achieving 100Lm/cW
- Plug and play Microwave sensor available easily fitted on site, emergency available

Cat No.	Type	Lumens	Wattage	Lm/W
LBA315WSCC	Fixed Output	900/1400/180	9W/14W/18W	100



LED Decorative Cirkulus Bulkhead Ø300mm Colour & Power Change

- Power switchable – 16W, 20W & 24W to suit lighting needs
- Colour switchable between 3000K, 4000K and 6500K to suit install environment
- Decorative 360° halo effect
- Easy install fit and clip wall bracket

Cat No.	Wattage	Lumens	Colour Temp	Colour
EBHH24BCC	16W / 20W / 24W	2650 / 2900 / 2750	3000K / 4000K / 6500K	Black



LED Decorative Liptus Bulkhead Ø220mm Colour Change

- Colour Change via wall switch
- Stylish modern design
- Strong weatherproof housing
- Easy fix wall bracket for quick installation

Cat No.	Wattage	Lumens	Colour
EBHL15BCC	15W	1350	Black



7.5W USB Rechargeable Compact Magnetic Work Light

- Compact design with stand/carry handle, hook and magnetic function
- USB charging port and charging indicator
- High and low power modes
- 2 mode Weatherproof power switch
- Toughened IK07 ABS constructed body with rubber trim for added protection

Cat No.	Type	Lumens	Wattage	Llm/cW	Size
LBS1G4	Standard	400	4.5W	88	115x115mm
LBS2G8	Standard	750	7W	88	175x115mm



Azurar GU10 PIR Wall Lantern

- Decorative modern design with waterproof die cast housing
- Adjustable time and Lux PIR controls
- Anti-staining polycarbonate diffuser
- IP44 weather protection
- Available in slate grey

Cat No.	Finish
LEXDCLGUGP	Slate Grey



Eco Outdoor Bulkhead

- Easy and quick installation
- High impact and durable housing
- Adjustable PIR, lux and time settings
- Supplied with interchangeable black and white bezels



Cat No.	Type	Lumens	Wattage	Llm/cW	Shape
EBER10S40	Standard	700	10W	70	Round
EBER10P40	Standard + PIR	700	10W	70	Round
EBEE10S40	Standard	400	10W	40	Eyelid
EBEE10P40	Standard + PIR	400	10W	40	Eyelid
EBEO10S40	Standard	700	10W	70	Oval
EBEO10P40	Standard + PIR	700	10W	70	Oval

Essence Security Floodlight With PIR Sensor

- Innovative Fit & Tilt multi-position ball joint for perfect directional focus – increase security lighting up those difficult to reach areas
- 2-part installation bracket for easy access quick & simple installation
- IP65 PIR with adjustable time and lux light setting
- Dusk-till-dawn PIR override - adjustable Time, Lux and Range sensitivity dials
- IP65 Corrosion-resistant die cast aluminium housing with tempered glass
- Pre-wired 1m H05RN-F rubber cable
- High efficiency 120lm/W long-life LED chips
- CRI 80 – suitable for use with CCTV
- Equivalent light to traditional halogen – 90% energy savings
- Suitable for residential or commercial outdoor security lighting
- Perfect for driveways, gardens, patios, entrance and walkways



Cat No.	Lumens	Wattage	Llm/cW	Colour Temp	WxHxD (mm)
EFLD10B40	1050	10W	105	4000K	114x140x70
EFLD20B40	2100	20W	105	4000K	129x150x70
EFLD30B40	3150	30W	105	4000K	144x161x70
EFLD50B40	5250	50W	105	4000K	184x193x70
EFLD10B40P	1050	10W	105	4000K	114x140x88
EFLD20B40P	2100	20W	105	4000K	129x150x88
EFLD30B40P	3150	30W	105	4000K	144x161x88
EFLD50B40P	5250	50W	105	4000K	184x193x88



Azurar Stainless Steel

- GU10 stainless steel constructed decorative wall light with tempered glass
- Single, Up/Down and PIR versions available
- Adjustable time and Lux controls for PIR version
- Range of colour finishing available – perfect for all residential installation in outdoor spaces including exterior walls, garden and communal patios areas and walkways



Cat No.	Type	IP Rating
LEXDSSUD	Up/Down	IP54
LEXDSSUDPIR	Up/Down PIR	IP54

Azurar Slate Grey

- GU10 stainless steel constructed decorative wall light with tempered glass
- Single, Up/Down and PIR versions available
- Adjustable time and Lux controls for PIR version
- Range of colour finishing available – perfect for all residential installation in outdoor spaces including exterior walls, garden and communal patios areas and walkways



Cat No.	Type	IP Rating
LEXDSSUDG	Up/Down	IP54
LEXDSSUDPIRG	Up/Down PIR	IP54

LED Garden Spike Kit 4 Pack or Single

- Easy plug and play 'do-it-yourself' install using push and fit connectors and 12V adaptor
- Latest integrated LED spike with high impact housing, tilt and rotatable head and tough hard wearing H05RN-F rubber cable
- Add extra LED spikes to your circuit for added coverage – 8 spikes maximum
- 1.8 metre spacing as standard – easy to add 2 metre extension cable for increased spacing



Cat No.	Type	IP Rating
LEXGSPK4P40	4 x 200	4 x 3W
LEXGSPK1P40	1 x 200	3W

LED Lantern

- Coach lantern with integrated LED technology
- Top and bottom arm options
- Plastic housing with four polycarbonate panels



Cat No.	Lumens	Wattage	Arm Type
LEXCL4B6B4	640	8W	Bottom
LEXCL4T6B4	640	8W	Top

12V LED Festoon

- Low voltage, safe for DIY
- Durable PET bulbs
- Hanging hook for easy installation
- IP44 weatherproof lamp holders IP67 in-line adaptor
- Durable black 2x0.3mm² PVC cable – suitable for prolonged outdoor use
- Connectable up to 50 bulbs (5x packs)
- 5m length has 10 fixed bulbs, spaced 50cm apart. Starter kits has extra 5m cable to connect to power

Cat No.	Lumens	Wattage
LEXFS10B21UK	10 x 80	8W (10 x 0.8W)



Solar Stainless Steel Wall Lantern

- Exterior wall light with solar power technology
- Stainless steel constructed body
- Product illuminates only when required with PIR / Photocell
- Perfect for external residential applications with no mains power, no wiring required

Cat No.	Lumens	Battery Type	Battery Capacity
LEXDSL1S40P	100	Ni-Mh 3x1.2V AAA	900mAh



Solar Guardian Wall Light

- Exterior wall light with solar power technology
- Polycarbonate body for increased durability
- PIR / Photocell with security and presence detection mode settings
- Perfect for external residential applications with no mains power, no wiring required

Cat No.	Lumens	Battery Type	Battery Capacity	Finish
LEXS22B40	220	Li-Ion 3.7V	1200mAh	Black
LEXS22W40	220	Li-Ion 3.7V	1200mAh	White
LEXS40B40	400	Li-Ion 3.7V	2000mAh	Black
LEXS40W40	400	Li-Ion 3.7V	2000mAh	White



Solar Decorative Prism 6W Wall Light

- No sun, no problem with inbuilt USB charging port for power top-up
- High quality monocrystalline solar panel
- Inbuilt ambient rear night light
- PIR motion sensor to extend battery life



Cat No.	Lumens	Wattage	Battery Capacity	Finish
LEXSW30W40	300	3W	3.7V 2400mAh	White
LEXSW30B40	300	3W	3.7V 2400mAh	Black
LEXSW60W40	600	6W	3.7V 2400mAh	White
LEXSW60B40	600	6W	3.7V 2400mAh	Black

Solar Brick Light with PIR Motion Sensor

- Adjustable PIR motion sensor with adjustable settings
- Auto charged from sunlight
- Zero Electricity Costs = 100% Energy Savings
- Ideal for residential applications that may be difficult to wire, including exterior walls, garden, drive, walkways and patios.

Cat No.	Lumens	Finish
LEXSBR80G30	900	Grey



Solar Decorative Era Slim with PIR Motion Sensor

- Ideal for paths, fences and low-level lighting
- Decorative unobtrusive design with a big light output
- Easy fix wall bracket for quick installation
- No wiring, simple fit and forget solution for difficult to light areas
- High quality monocrystalline solar panel
- 5 lighting modes
- Time Delay 30 seconds
- Detection Range 5m

Cat No.	Lumens	Wattage	Battery Type
LEXSBR100B30	1000	7W	3.7V 2000mAh



Solar Guardian Floodlight with PIR and detachable Solar Panel

- Detachable bracket allows solar panel to be located on another wall to face direction of sun.
- 5m cable included
- Polycarbonate body for increased durability
- 2 lighting modes including NightGlow
- Perfect for external residential applications with no mains power, no wiring required, including entrance & driveway, gates & access areas, shed & outhouse



Cat No.	Lumens	Battery Type	Battery Capacity	Finish
LEXSF8B40	800	Li-ion 3.7V	2000mAh	Black
LEXSF15B40	1500	Li-ion 3.7V	4000mAh	Black

Solar Decorative Carina Bulkhead with PIR Motion Sensor

- Ideal for paths, fences and low-level lighting
- Decorative unobtrusive design with a big light output
- No wiring, simple fit and forget solution for difficult to light areas
- High quality monocrystalline solar panel
- 3 lighting modes including dusk-till-dawn output
- PIR motion sensor to extend battery life




Cat No.	Lumens	Wattage	Battery Capacity	Finish
LEXSBH47B40	470	5W	3.7V 2000mAh	Oval
LEXSBH50B40	500	5W	3.7V 2000mAh	Eyelid

Storm Photocell

- Sleek domestic photocell with modern black appearance
- 15 lux on, 70 lux off light level setting
- Includes a 2 minute cloud time delay



Cat No.	Lumens	Wattage	Battery Type
LSPC500	220	2.7W	Li-ion, 1800mAh, 3.7VDC



Guardian Exterior

- Energy saving control for Outdoor use IP44
- Surface mounted white finish
- 12m Detection range
- Perfect for LED or traditional lighting technology
- Manual override



Cat No.	Maximum Load	Detection Range	Detection Distance
LGIP44WSB	1200W (220-240V/AC)	180°	5-12 metre max (<24° C)
LGIP44WSW			



Solar Decorative Aries Wall Light with PIR Motion Sensor

- Durable and weather resistant housing
- High quality monocrystalline solar panel
- 4 lighting modes
- PIR motion sensor to extend battery life
- Detection range 8m
- Time delay 25 seconds



Cat No.	Lumens	Wattage	Battery Type
LEXSL60B30	600	5W	3.7V 2000mAh




Solar Decorative Stealth Wall Wash Light With PIR Motion Sensor

- Ideal for paths, fences and low-level lighting
- Decorative unobtrusive design with a big light output
- Easy fix wall bracket for quick installation
- No wiring, simple fit and forget solution for difficult to light areas
- High quality monocrystalline solar panel
- 5 lighting modes including dusk-till-dawn output
- PIR motion sensor to extend battery life
- Time Delay 30 seconds
- Detection Range 5m



Cat No.	Lumens	Wattage	Battery Type
LEXSWW100B30	1000	7W	3.7V 2000mAh



Solar Decorative Filament Wall Light with PIR Motion Sensor & Bulb Included

- Durable and weather resistant die cast aluminium housing
- High quality monocrystalline solar panel
- 4 lighting modes
- PIR motion sensor to extend battery life
- Detection Range 8m
- Time Delay 25 seconds

Cat No.	Lumens	Wattage	Battery Type
LEXSL22B30	220	2.7W	Li-ion, 1800mAh, 3.7VDC



Solar Security High Output Floodlight Mensa Colour Change and Remote Control

- Durable die-cast aluminium cover
- UV-proof optical lens for uniform light distribution
- Super bright light output
- High-efficiency monocrystalline solar panel
- Battery indicator showing battery life and charging state
- Li-ion battery for a longer lifespan
- Charging time of 4-6 hours
- 5m extension cord

Cat No.	Lumens	Wattage	Battery Charging Time
LEXSFD10BCC	1500	10W	4-6 hours



Elara Bay

- LED lowbay with fastfix gearay and option of open area (90 degrees) or racking lens (30 degrees)
- Optimised lumen outputs to replace 250W and 400W discharge lamps offering up to 143 Llm/cW
- IK10 high impact resistant steel body and polycarbonate lenses suitable for surface, trunking or suspended mount installation
- Dimmable and PIR sensor options available with recommended maximum heights of 12 metres



Cat No.	Type	Lumens	Wattage	Llm/cW
ELB16WS40		16000	112W	143
ELB21WS40	Standard	21000	155W	135
ELB30WS40		30000	240W	125



LuxPack Essence

- Surface mounting linear batten offering equivalent performance in 1200mm, 1500mm and 1800mm lengths
- Robust iron constructed body with BESA fixing points and large opal polycarbonate diffuser for improved uniformity
- Quick slide release tabs for fast and easy installation of plug and play hinged LED diffuser



Cat No.	Type	Lumens	Wattage	Llm/cW	Length	CCT
LXB12WLCC	Fixed Output	2400-4800	20-40W	120	1200mm	4000K
LXB15WLCC	Fixed Output	3600-7200	30-60W	120	1500mm	4000K



Titan All-in-one High Bay

- Titan All in One highbay a fully flexible highbay that gives you every option that you will need in a single product
- Die-cast aluminium housing with patented adjustable optic lens providing wide and narrow distributions.
- Power change and colour change 16,000-32,000lm 4000K-6500K
- Supplied with 1m pre-wired cable suspended via eye bolt hook
- High output emergency of over 900 lumens



Accessories - Universal Plug in Emergency Pack & Plug in Microwave for LXB & ECL

- Plug and Play 2W emergency pack & Microwave sensor
- Fully toolless install means the pack and sensor can be installed on site
- Colour coded and alternate style connectors make wiring easy and foolproof



LuxPack Essence

- Power Change, 4ft, 5ft & 6ft body each switchable between High/Low output
- 4ft & 5ft versions available with switchable colour temperature
- Plug and play emergency pack and microwave sensor
- SpeedFit diffuser



Cat No.	Type	Lumens	Wattage	Llm/cW	Length	CCT
ECL120LCC	Fixed Output	2400-4800	20-40W	120	1200mm	4000K
ECL150LCC	Fixed Output	3000-6000	25-50W	120	1500mm	4000K



Trunking White Shrinkwrapped Kit 20x10mm

- 3x 1m lengths c/w Flat Bend, Internal Bend, External Bend & 2x Coupler.
- Designer Shapes and colours - Subtle appearance with no sharp edges; to blend with decor
- Colour options to save painting, or provide a striking feature
- Self-adhesive - Simply peel & stick (Can be drilled also)
- Easy-clean profile - No flat dust-ledges & easily wipes clean
- Paintable - Can blend with any decor

Cat No.
604852



Trunking White Shrinkwrapped Kit 30x15mm

- 3x 1m lengths c/w Flat Bend, Internal Bend, External Bend & 2x Coupler.
- Designer Shapes and colours - Subtle appearance with no sharp edges; to blend with decor
- Colour options to save painting, or provide a striking feature
- Self-adhesive - Simply peel & stick (Can be drilled also)
- Easy-clean profile - No flat dust-ledges & easily wipes clean
- Paintable - Can blend with any decor

Cat No.
604869



Trunking White 60x15mm

- 760mm Length TV Drop White c/w Eurohook
- Designer Shapes and colours - Subtle appearance with no sharp edges; to blend with decor
- Colour options to save painting, or provide a striking feature
- Self-adhesive - Simply peel & stick (Can be drilled also)
- Easy-clean profile - No flat dust-ledges & easily wipes clean
- Paintable - Can blend with any decor

Cat No.
604982



Trunking Black 60x15mm

- 760mm Length TV Drop White c/w Eurohook
- Designer Shapes and colours - Subtle appearance with no sharp edges; to blend with decor
- Colour options to save painting, or provide a striking feature
- Self-adhesive - Simply peel & stick (Can be drilled also)
- Easy-clean profile - No flat dust-ledges & easily wipes clean
- Paintable - Can blend with any decor

Cat No.
604999



Cable Tidy Home, Small White

- Tidy, route & sort unsightly cable clutter
- Make surfaces easier to clean
- Make socket blocks less accessible
- Prevent feet snagging cables under desks
- save entanglements and costly disconnections
- Produced using electrically-safe ABS material

Cat No.
CTHSMWL/SW



Cable Tidy Home, Small Black

- Tidy, route & sort unsightly cable clutter
- Make surfaces easier to clean
- Make socket blocks less accessible
- Prevent feet snagging cables under desks
- save entanglements and costly disconnections
- Produced using electrically-safe ABS material

Cat No.
CTHSMBL/SW



Cable Tidy Split Tube

- 32mm dia. White - 1.1m
- Tidy & protect several cables
- Ideal to contain cables dropping behind TVs and desks
- Pre-split - fits around existing cables
- Flexible & easiest to add or remove cables
- Fully safety tested and certified to EN 60695-2-11: 2014

Cat No.
CTT1.1W



Cable Tidy Split Tube


- 32mm dia. Black - 1.1m
- Tidy & protect several cables
- Ideal to contain cables dropping behind TVs and desks
- Pre-split - fits around existing cables
- Flexible & easiest to add or remove cables
- Fully safety tested and certified to EN 60695-2-11: 2014

Cat No.
CTT1.1B



Cable Tidy Wrap

- 2.5m, 10-40mm expandable dia.
- Ideal to conceal & protect longer runs of cables
- Quick and easy to use
- Flexible design and good resistance to oils/lubricants, acids & alkalis - suitable for use around plant and machinery too
- Zip tool included in pack
- Operating temperature -30°C to +85°C

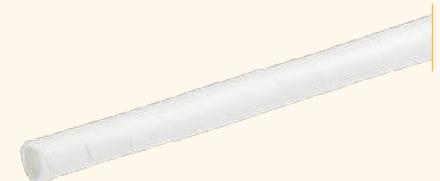

Cat No.

CTW2.5W

Cable Tidy Wrap

- 2.5m, 10-40mm expandable dia
- Ideal to conceal & protect longer runs of cables
- Quick and easy to use
- Flexible design and good resistance to oils/lubricants, acids & alkalis - suitable for use around plant and machinery too
- Zip tool included in pack
- Operating temperature -30°C to +85°C



Cat No.

CTW2.5B

Handy Hanger

- 760mm Length TV Drop White c/w Eurohook
- Designer Shapes and colours - Subtle appearance with no sharp edges; to blend with decor
- Colour options to save painting, or provide a striking feature
- Self-adhesive - Simply peel & stick (Can be drilled also)
- Easy-clean profile - No flat dust-ledges & easily wipes clean
- Paintable - Can blend with any decor



Cat No.

604555

Cable Tidy Base (Pack of 6)

- Self-adhesive - Simply peel & stick
- Tidy, route & sort unsightly cable clutter



Cat No.

EU/CTBASE001

Cable Tidy Hook & Loop Band

- 20mm Black 1.2m Length
- Self-adhesive - Simply peel & stick
- Tidy, route & sort unsightly cable clutter



Cat No.

CTTAPE20001

Cable Tidy Clips - White (Pack of 20)

- 20mm Black 1.2m Length
- Self-adhesive - Simply peel & stick
- Tidy, route & sort unsightly cable clutter



Cat No.

CTCLIP20PK

Desk Cable Organiser Kit

- Under desk Tray 400mm x 140mm x150mm (l x w x h) c/w 1.3m Spiral Wrap, 3x Cable Bases, 600mm Hook & Loop Band (Tape / Screw fixing options)
- Assemble in seconds
- Robust steel construction
- Easy screw-fix or self-adhesive fitting options
- Peel & stick or screw-fix (tape & screws provided)
- Made in UK



Cat No.

DCK

10x08 Trunking 2m White Self Adhesive

- Tidy & protect your cable
- Self-adhesive - Simply peel & stick
- Subtle appearance with no sharp edges; to blend with decor
- The trunking has a clip-on lid and the corners can be mitre-cut



Cat No.


DLFSA108W/2

16x16 White Box Trunking

- 1x 2m Length, Self-Adhesive c/w barcode label
- Tidy & protect your cable
- Self-adhesive - Simply peel & stick

Cat No.

DLFSA1W/2

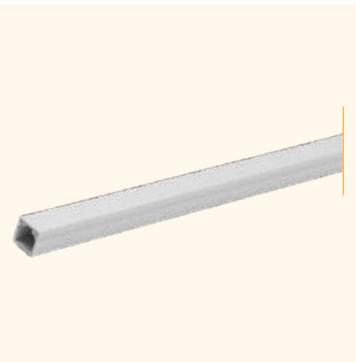

16x16mm White Box Trunking Clip-Over Multipack

- 2x Internal Bend, 2x External Bend, 2x Flat Bend, 1x Equal Tee, 2x Connectors, 2x End Caps
- Tidy & protect your cable
- The trunking has a clip-on lid and the corners can be mitre-cut

Cat No.

DLFSA1-AP




25x16mm White Box Trunking

- 1x 2m Length, Self-Adhesive c/w barcode label
- Tidy & protect your cable
- Self-adhesive - Simply peel & stick

Cat No.

DLFSA2W/2

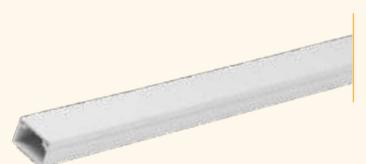


White Box Trunking Clip-Over Flat Bend

- 25x16mm, 2x Flat Bend Clips
- Tidy & protect your cable

Cat No.

DLFFA2/2




White Box Trunking Clip-Over Internal Bend

- 25x16mm, 2x Internal Bend Clips
- Tidy & protect your cable

Cat No.

DLFIA2/2




White Box Trunking Clip-Over External Bend

- 25x16mm, 2x External Bend Clips
- Tidy & protect your cable

Cat No.

DLFEA2/2



White Box Trunking Clip-Over Equal Tee Pack

- 25x16mm, 1x Equal Tee Pack
- Tidy & protect your cable

Cat No.

DLFFT2




White Box Trunking Clip-Over Coupler

- 25x16mm, 2x Coupler Clips
- Tidy & protect your cable

Cat No.

DLFSC2/2



Standard HDMI Cable

- This stylish Ross cable is 24K Gold plated HDMI Male to Male with a plastic moulded head & the cable protected by a PVC jacket
- Supports all HDMI connections including next generation Ultra HD /4K televisions
- Supports HDMI with Ethernet - take advantage of your SMART internet-enabled devices without a separate Ethernet cable
- Delivers true 3D gaming & home cinema experience

Cat No.	Cable Length (M)
HDMI15-RO	1.5M
HDMI3-RO	3M
HDMI5-RO	5M



Satellite (F) Cable

- Connect your satellite equipment to your set top box or wall socket with the secure & reliable Male to Male satellite 'F' cable with female coupler
- Plastic moulded heads with strain relief
- 3C-2V Cable
- Male to Male Nickel satellite 'F' plugs

Cat No.	Cable Length (M)
SATL15-RO	1.5M
SATL3-RO	3M
SATL5-RO	5M
SATL10-RO	10M



Coax Cable

- Connect your television to your antenna with the secure & reliable Male to Male Aerial Cable with female coupler
- RG6 Cable
- Male to Male Nickel Co-axial plugs
- Includes female couple to allow you to extend or convert the cable

Cat No.	Cable Length (M)
TVLC15-RO	1.5M
TVLC3-RO	3M
TVLC5-RO	5M
TVLC10-RO	10M



Flat to Wall TV Mount

- For 23-50" Screens
- Maximum Supporting Weight 25kg
- Without Locking Mechanism
- Steel Construction
- For Internal Use

Cat No.	Minimum VESA	Maximum VESA
RTMF200-RO	75x75mm	200x200mm



Flat to Wall TV Mount

- For 32-70" Screens
- Maximum Supporting Weight 60kg
- Locking Mechanism Secures TV to Wall
- Steel Construction

Cat No.	Minimum VESA	Maximum VESA
RTMF400-RO	200x200mm	400x400mm



Flat to Wall TV Mount

- For 50-85" Screens
- Maximum Supporting Weight 60kg
- Locking Mechanism Secures TV to Wall
- Steel Construction
- For Internal Use

Cat No.	Minimum VESA	Maximum VESA
RTMF600-RO	200x200mm	600x600mm



Tilt TV Mount

- For 23-50" Screens
- Maximum Supporting Weight 30kg
- Without Locking Mechanism
- Steel Construction
- For Internal Use

Cat No.	Minimum VESA	Maximum VESA
RTMT400-RO	200x200mm	400x400mm



Tilt TV Mount

- For 32-70" Screens
- Maximum Supporting Weight 50kg
- Quick-Release Locking Mechanism
- Steel Construction
- For Internal Use

Cat No.	Minimum VESA	Maximum VESA
RTMT600-RO	200x200mm	600x600mm



Tilt & Turn TV Mount

- For 23-50" Screens
- Maximum Supporting Weight 30kg
- Without Locking Mechanism
- Steel Construction
- For Internal Use

Cat No.	Minimum VESA	Maximum VESA
RTMST200-RO	75x75mm	200x200mm



Single Arm TV Mount

- For 13-27" Screens
- Maximum Supporting Weight 25kg
- Without Locking Mechanism
- Steel Construction
- For Internal Use


Cat No.	Minimum VESA	Maximum VESA
RTMSA100-RO	75x75mm	100x100mm



Single Arm TV Mount

- For 23-50" Screens
- Maximum Supporting Weight 30kg
- Without Locking Mechanism
- Steel Construction
- For Internal Use

Cat No.	Minimum VESA	Maximum VESA
RTMSA200-RO	75x75mm	200x200mm



Full Motion TV Mount

- For 13-27" Screens
- Maximum Supporting Weight 25kg
- Without Locking Mechanism
- Steel Construction
- For Internal Use


Cat No.	Minimum VESA	Maximum VESA
RTMTA100-RO	75x75mm	200x200mm



Full Motion TV Mount

- For 23-50" Screens
- Maximum Supporting Weight 30kg
- Without Locking Mechanism
- Steel Construction
- For Internal Use

Cat No.	Minimum VESA	Maximum VESA
RTMTA200-RO	100x100mm	200x200mm



Full Motion TV Mount

- For 32-70" Screens
- Maximum Supporting Weight 50kg
- Locking Mechanism Secures TV to Wall
- Steel Construction
- For Internal Use

Cat No.	Minimum VESA	Maximum VESA
RTMRTA400-RO	200x200mm	400x400mm



Full Motion TV Mount

- For 50-85" Screens
- Maximum Supporting Weight 50kg
- Locking Mechanism Secures TV to Wall
- Steel Construction
- For Internal Use

Cat No.	Minimum VESA	Maximum VESA
RTMRTA600-RO	200x200mm	600x600mm



Ordering made simple with Luceco ePortal

Online ordering platform designed to make your life easier.


- ⦿ **Fast & efficient ordering** Use saved baskets or upload via CSV files
- ⦿ **Real-time stock & pricing** Instantly see current stock levels and pricing.
- ⦿ **Full account control** Manage orders and track activity
- ⦿ **Confident quoting** Quote jobs with up-to-date product availability
- ⦿ **24/7 ordering** Place orders when it suits you, no need to call



Built for Wholesalers & Independent Retailers


Whether you're ordering for stock or quoting for a tender, ePortal gives you fast, self-service access to the entire Luceco, BG, Masterplug, Sync Energy and D-Line product ranges, all in one place.

**NEW
SAVE BASKET
FEATURE**

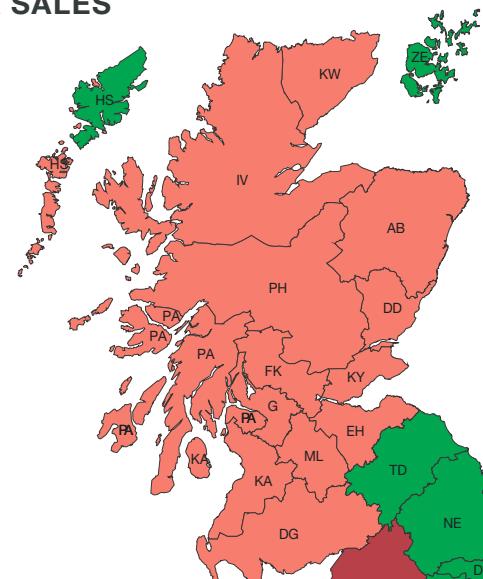

Sean Higgins
07890 651 152

Natalie Frankum
07580 939196
natalie.frankum@luceco.com

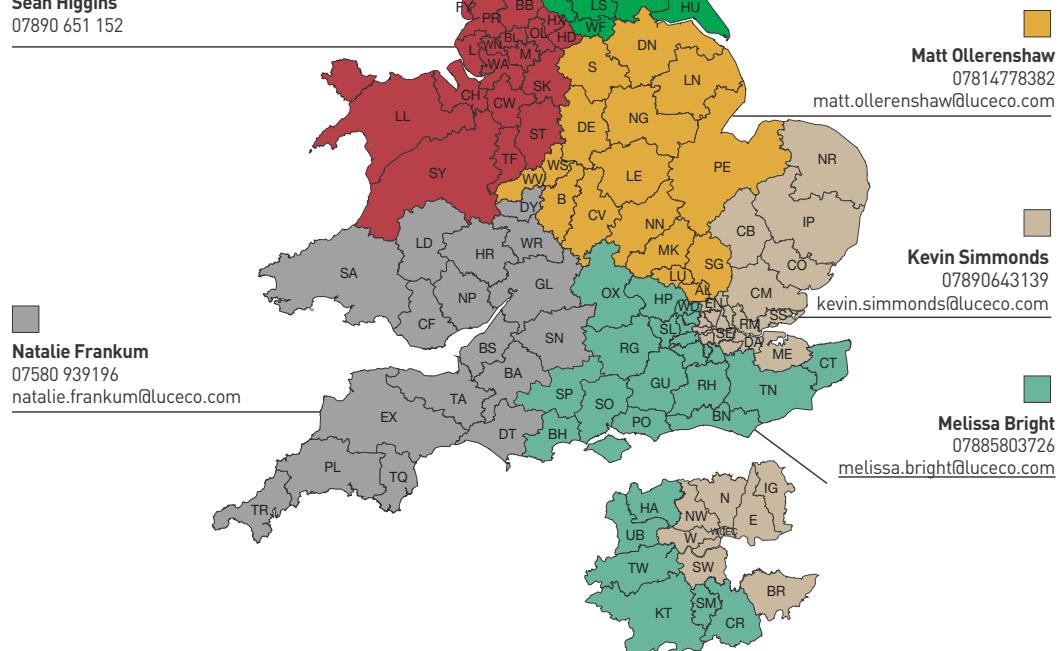

Nathan Hayward
07974414945
nathan.hayward@luceco.com

Matt Ollerenshaw
07814778382
matt.ollerenshaw@luceco.com

Kevin Simmonds
07890643139
kevin.simmonds@luceco.com

Melissa Bright
07885803726
melissa.bright@luceco.com

UK:**HEAD OFFICE:**

Email: info@luceco.com

Luceco plc, Caparo House
103 Baker Street, London
England, W1U 6LN

DISTRIBUTION CENTRE:

Tel: +44 (0) 1952 238 100

Email: uk_sales@luceco.com

Luceco plc
Luceco Distribution Centre
Stafford Park 1, Telford
Shropshire, England, TF3 3BD

IRELAND:

Email: sales@luceco.ie

FRANCE:

Email: fr_sales@luceco.com

ITALY:

Email: it_sales@luceco.com

SPAIN:

Tel: +34 93 829 55 75

Email: es_sales@luceco.com

Luceco Southern Europe S.L.C/
Bobinadora 1-5
08302 Mataró
Barcelona, Spain

MIDDLE EAST & AFRICA:

Tel: +971 4 609 1867

Email: mea_sales@luceco.com

Luceco Middle East FZCO
Bldg. 5EB, Office 434
PO Box 371128, DAFZA
Dubai, UAE

ASIA PACIFIC:**JIAXING:**

Tel: +86 (0) 573 8357 0200

Email: asia_sales@luceco.com

No 1438, Jiachuang Road Xiuzhou Industrial Park,
Jiaxing Zhejiang, China, P.C. 314031

HONG KONG:

Email: hk_sales@luceco.com

UNITED STATES:

Email: us_sales@luceco.com

MEXICO & LATIN AMERICA:

Tel: +52 (81) 5000 9437

Email: ventas@luceco.com

Luceco México
AV Lázaro Cárdenas #318 int 201
Col Real San Agustín
San Pedro Garza García
N.L. Mexico CP 66278

TECHNICAL SUPPORT:

Tel: 01952 238 128

Email: technical.support@bgelectrical.co.uk

Lines open Monday to Friday 8.30am to 5pm, with
answer phone service outside these hours.

LUCECO
G R O U P

